

Data Sheet

FUJITSU Mainboard D3231-S µATX

Industrial Series



Powered by the Intel® Q87 Express Chipset supporting DDR3 1600 SDRAM Memory and 4th generation Intel® Core™ i3 / i5 / i7 Processors (Socket LGA1150)
Designed & approved for enhanced operating temperature range from 0°C to 60°C
Designed & approved for 24/7 continuous operation

Chipset:

Intel® Q87 Express Chipset

Processors:


Intel® Core™ i7 / i5 / i3 – 4xxx processor series
Intel® "TE" Haswell-based embedded series
Intel® Pentium® – G3xxx processor series
Intel® Celeron® – G18xx processor series
Ready for "Haswell Refresh" processor series

Memory:

DDR3 1333/1600 SDRAM

Product Features:

Intel® VPro 2014 = Intel® iAMT 9.1 (CPU support required)
Intel® HD Graphics (integrated in processor, e.g. HD4600)
PCI Express Gen3
8 Bit GPIO & multichannel Audio onboard
USB 2.0 / 3.0 and USB socket (stick/dongle) onboard
2 x Intel GbE LAN onboard (incl. teaming support)
Infineon TPM V1.2 onboard
BIOS-POST/-Boot & OS – HW Watchdog onboard

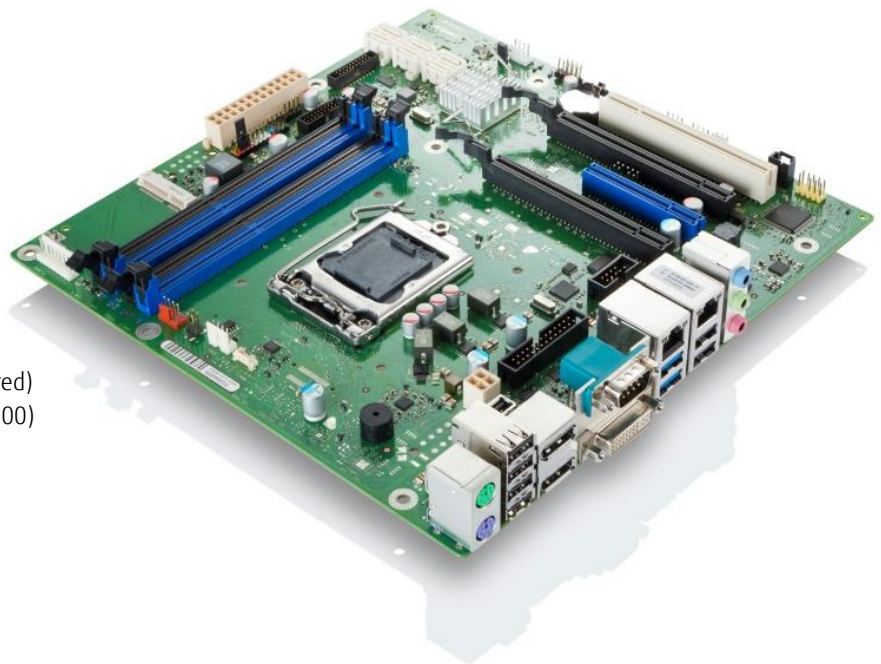

Features and benefits

Board Size	µATX: 9.6" x 9.6" (243.8 x 243.8 mm)
Chipset	Intel® Q87 Express Chipset
Memory	4 DIMM Sockets (1.5V / 1.35V), 1GB - 32GB, Single Channel / Dual Channel DDR3-1333 (CL9) and DDR3-1600 (CL11) SDRAM, unbuffered, no ECC
Processor	Intel® Core™ i7 / i5 / i3 - 4xxx processor series Intel® "TE" Haswell-based embedded processor series Intel® Pentium® - G3xxx processor series Intel® Celeron® - G18xx processor series Socket LGA1150, max. 95W TDP (For details on supported processors please refer to our website)

Power Specification
 ATX- 24 Pin or ATX- 20 Pin Power Supply required; Support for Soft-Off Power Supplies; 3.3V Auxiliary Supply Voltage on PCIe Slots (Wake-Up Function)
 On board CPU Core Voltage Regulator

Power Supply Requirements
 for onboard components (worst case incl. processor, memory, USB devices; w/o PCIe cards, w/o SATA drives)

Source	Voltage	Min. PS Load	Max.Voltage Tolerance	Mainboard Capacitive Load	Max. Mainboard Current
Main Power Supply	+ 12V	0.05A	± 5 %	10.000µF	14A/18A ¹⁾
	- 12V	0A	± 10 %	500µF	0.3A
	+ 5V	0.2A	± 5 %	10.000µF	10A
	+ 3.3V	0A	± 5 %	6.000µF	2A
Aux. Power	+ 5Vaux	0A	+5 % / -3%	7.000µF	2.5A

1) 18A = Surge Current for 20 sec!

BIOS
 AMI Aptio 4.x (UEFI) BIOS
 modified and adapted by Fujitsu Technology Solutions; Recovery BIOS, SM-BIOS (DMI), BIOS and CPU Microcode Update, Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM and PCI Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, ACPI S3/S4, Wake on time from S5, BIOS integrated HW Diagnostic Tool

Security Features
 Recovery BIOS, System and BIOS Password, Boot Sequence Control, Serial-/ Parallel-/ USB- Port Access Protection, Boot Sector Virus Warning, Write Protection for Flash BIOS, EraseDisk (BIOS Feature), Infineon TPM V1.2.

Special Features	Description
Silent Fan	Independent temperature related processor fan and system fan supervision and control
System Guard	View and adjust Silent Fan features
Silent Drives	Noise reduction for optical and hard disk drives
Recovery BIOS	Restores a corrupted BIOS
Desk Update	Simple driver update with Driver&Utilities DVD
Multi Boot	Comfortable boot from any boot device
HDD Password	Access protection for disk drives

Designed for Industrial Applications
 Longlife components: Designed for 24/7 use in industrial applications
 Tin-plated PCB: Improved durability of PCB surface
 Revision control: Strict control and pre-announcement
 Extended lifecycle: Mainboard available for more than four years
 Industrial grade EMI immunity
 Enhanced operating temperature range (0°C-60°C) ⁴⁾

Supported / Released Operating Systems


OS	"Runnable"	"Tested/Released by Fujitsu"
MS Windows XP	--	--
MS Windows 7-32/64	X	X
MS Windows 8.1-64	X	X
MS Windows 10-64	X	planned
Linux-32/64	X	--

Graphics	Intel® HD Graphics (e.g. HD4600, depends on installed processor), DX11.1
Audio	Realtek ALC671, 5.1-channel, High Definition Audio Codec
LAN	Intel i217LM / Intel i210AT Ethernet Controller with 10/100/1000 Mbit/s, iAMT, Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display, Teaming Support
Drives	6 Serial ATA III 600 Interface (up to 6Gbit/s), NCQ, AHCI, RAID 0/1/5/10 1 mSATA (fullsize), ATA III 600 (shared with one SATA port)), incl. USB2.0


Features	D3231-S
Chipset	iQ87
Board Size	µATX
VGA / DVI-I / DVI-D / DisplayPort V1.2 / LVDS	- ³⁾ / ✓ / - / ✓ / ✓ / -
Stereo Audio / 5.1 Multichannel Audio	- / ✓
Buzzer / int. Speaker Support	✓ / ✓
Dual LAN Gbit / 100 Mbit / 10 Mbit	✓ / ✓ / ✓
LAN ASF / DASH 1.0 / WoL / Boot / VPro 2014 (iAMT 9.1)	- / ✓ / ✓ / ✓ / ✓ / ✓
SATA / ATA / RAID / eSATA-support / mSATA	✓ / - / ✓ / ✓ / ✓ / ✓
FireWire™ / USB 2.0 / USB 3.0	- / ✓ / ✓
FAN monitored PSU ¹⁾ / CPU / AUX1 / AUX2 / AUX3 ¹⁾	✓ / ✓ / ✓ / ✓ / ✓
FAN controlled PSU ¹⁾ / CPU / AUX1 / AUX2 / AUX3 ¹⁾	✓ / ✓ / ✓ / ✓ / ✓
TEMP monitored CPU / onboard sensors / external sensor	✓ / ✓ / -
Special Features	
Silent Fan / Silent Fan LT / System Guard / Silent Drives	✓ / - / ✓ / ✓ / ✓
Recovery BIOS / Desk Update / Multi Boot	✓ / ✓ / ✓
HDD Password / HDD Encryption / EraseDisk / TPM	✓ / - / ✓ / ✓ / ✓
Logo Boot Option / Intel On Screen Branding	✓ / ✓
High Efficiency Core Voltage Regulator Design	✓
BIOS POST- / BIOS Boot- / OS- HW Watchdog	✓ / ✓ / ✓
Operating Mode 24-7 / 8-5 (hrs per day - days per week)	✓ / -
Mainboard operating temperature range (chassis inside)	0°C - 60°C
Internal Connectors	
DIMM Sockets (DDR3 1600)	4
PCI Express x16 Slot (Gen3)	1
PCI Express x16 Slot (4 Lanes, Gen2) / x8 Slot (1 Lane, Gen2)	1 / 1
PCI Slots (32Bit, 33 MHz, Rev. 2.3)	1
SATA-600 / SATA-300 / ATA / Floppy / mSATA	6 / 0 / 0 / 0 / 1
S/PDIF (digital Audio) OUT / IN	1 / 0
Frontpanel Audio (9-Pin, HD Audio)	1
USB 2.0 channels / USB 3.0 channels / USB Stick (2.0)	2 / 2 / 1
Serial (FIFO, 16550 compatible)	1
FAN PSU ¹⁾ / CPU / AUX1 / AUX2 / AUX3 ¹⁾	1 / 1 / 1 / 1 / 1
SMBus (Case Temperature)	-
Intrusion (Case Open) / GPIOI(8Bit)	1 / 1
Parallel (EPP/ECP) Pin Connector ²⁾	1
Power 24 pin (BTX) / 4 pin (12V processor supply)	1 / 1
External Connectors	
VGA Sub D ³⁾ / DVI-I / DVI-D / DisplayPort V1.2	- / 1 / - / 2
Audio Mic. In / Line in / Line out (or driver configuration)	1 / 1 / 1
S/PDIF (digital Audio) OUT / IN	- / -
LAN (RJ-45)	2
PS/2 Mouse / Keyboard	1 / 1
USB 2.0 / USB 3.0	6 / 2
Serial (RS232, FIFO, 16550 compatible)	1
Parallel (EPP/ECP) ²⁾	-

- 1) Not supported by standard Power Supplies; FAN PSU and FAN AUX3 cannot be used simultaneously (Selectable in BIOS Setup)
- 2) External parallel port possible via optional connector cable
- 3) Via optional DVI-I / VGA interface connector
- 4) Forced cooling required, see technical documentation for detailed requirements

External Connectors

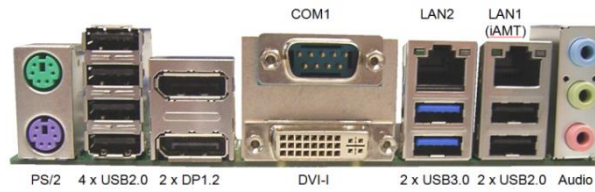

Connector / Socket Diagram

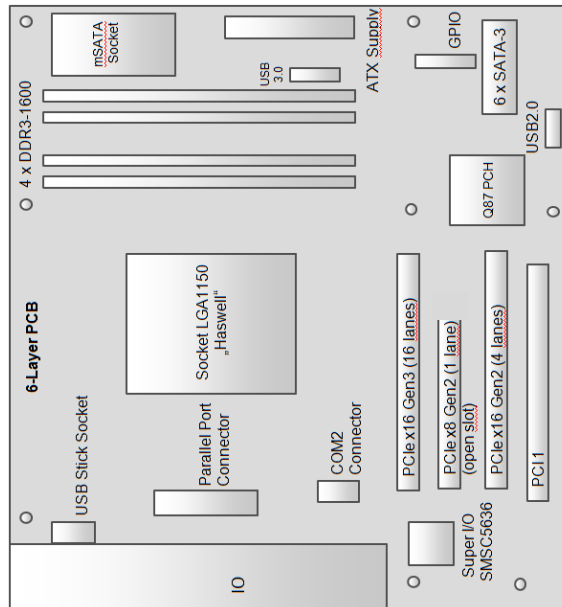

Accessories

Parallel Port Cable ATX / SFF		S26361-F5000-K003 S26361-F5000-K004
Parallel Port Cable "ATX		S26361-F5000-K003
Parallel Port Cable "ATX Slotbracket		S26361-F5000-K005
PCIe x1 DASH LAN Controller	D2907-A11	S26361-F5000-L001
Risercard 1x PCIe X4	D3318-A	S26361-F5000-R006
M.2 Carrier Board	D3352-A2	S26361-F5000-M002



Further industrial products offered by Fujitsu

- Connectors
- KVM Switches
- Relays
- Touch Panels
- Thermal Printers
- Wireless Modules



24 Volt Kiosk Printers



Multi-Input Touch Panels

Contact:

Fujitsu Components Europe, B.V.
 Tel.: +31 (0)23 556 0910
 Fax: +31 (0)23 556 0950
 Website: emea.fujitsu.com/components
 Address: Diamantlaan 25
 2132 WV Hoofddorp
 Netherlands

More information

Fujitsu products, solutions & services

Products

www.fujitsu.com/global/products/
In addition to the Fujitsu [Product name], Fujitsu offers a full portfolio of other computing products.

Computing products

- Storage systems: ETERNUS
- Server: PRIMERGY, PRIMEQUEST, Fujitsu SPARC M10, BS2000/OSD Mainframe
- Client Computing Devices: LIFEBOOK, STYLISTIC, ESPRIMO, FUTRO, CELSIUS
- Peripherals: Fujitsu Displays, Accessories
- Software
- Network

Product Support Services with different service levels agreements are recommended to safeguard each product and ensure smooth IT operation.

Solutions

<http://www.fujitsu.com/global/solutions>
The Fujitsu solutions combine reliable Fujitsu products with the best in services, know-how and worldwide partnerships. Fujitsu's Solutions include parts of one or more activity groups (e.g., planning, implementation, support, management, and training services) and are designed to solve a specific business need.

Infrastructure Solutions are customer offerings created by bringing Fujitsu's best products, services and technologies together with those from partners to deliver benefit to our customers' businesses.

Industry Solutions are tailored to meet the needs of specific verticals.

Business and Technology Solutions provide a variety of technologies developed to tackle specific business issues such as security and sustainability, across many verticals.

Services

www.fujitsu.com/global/services/
Several customizable Fujitsu Service offerings ensure that IT makes a real difference and delivers true business value. We do this by leveraging our extensive experience in managing large, complex, transformational IT programs to help clients in planning, delivering and operating IT services in a challenging and changing business environment.

Application Services support the development, integration, testing, deployment and on-going management of both custom developed and packaged applications. The services focus on delivering business and productivity improvements for organizations.

Business Services respond to the challenge of planning, delivering and operating IT in a complex and changing IT environment.

Managed Infrastructure Services enable customers to deliver the optimal IT environment to meet their needs – achieving high levels of IT service quality and performance for data center and end user environments.

Fujitsu green policy innovation

www.fujitsu.com/global/about/environment/
Fujitsu Green Policy Innovation is our worldwide project for reducing burdens on the environment. Using our global know-how, we aim to resolve issues of environmental energy efficiency through IT. Please find further information at:



More information

Learn more about Fujitsu, please contact your Fujitsu sales representative, Fujitsu business partner, or visit our website.
www.fujitsu.com/fts/mainboards/

Copyright

© 2015 Fujitsu Technology Solutions GmbH
Fujitsu and the Fujitsu logo are trademarks or registered trademarks of Fujitsu Limited in Japan and other countries.

Intel® Q87 Express Chipset, Intel® Core™ i7 / i5 / i3 4xxx, Intel® "TE" Haswell, Intel® Pentium®- G3xxx and Intel® Celeron G18xx are trademarks or a registered trademark of Advanced Micro Devices, Inc. in America and other countries. Other company, product and service names may be trademarks or registered trademarks of their respective owners.

All rights reserved, including intellectual property rights. Changes to technical data reserved. Delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded.

Disclaimer

Technical data subject to modification and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

Contact

FUJITSU Technology Solutions
OEM Mainboard Sales
Email: oem-sales@ts.fujitsu.com

Website: <http://ts.fujitsu.com>
2016-08-01