


### Overview


### HP Compaq 8000 Elite Ultra Slim Desktop Business PC

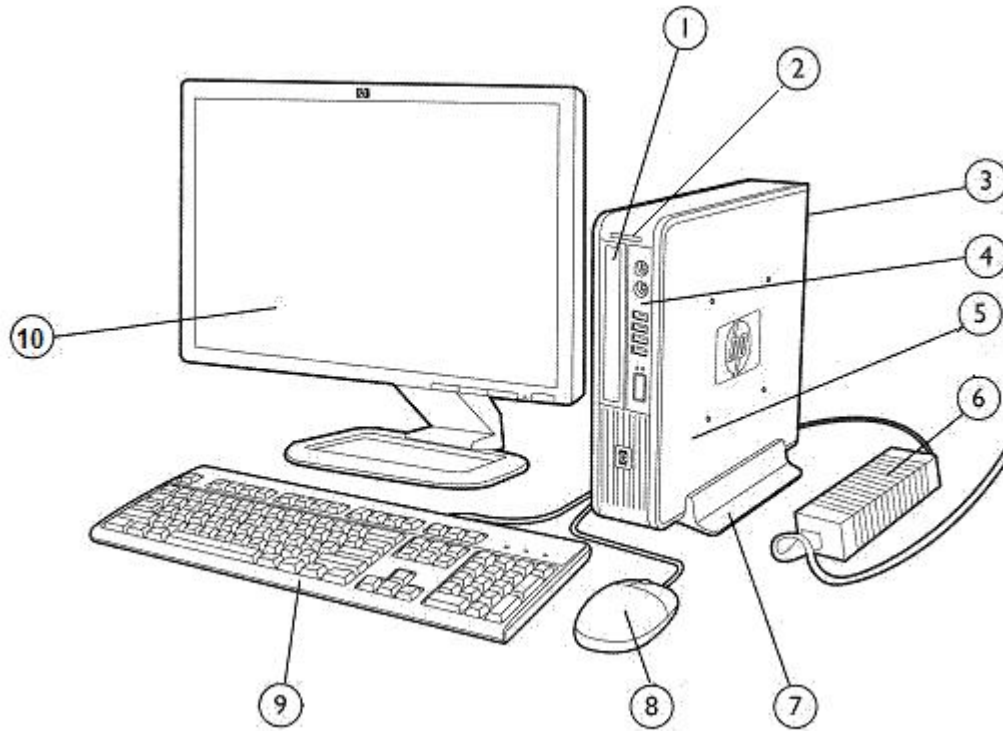

- 1 Optical Disc Drive
- 2 Secure Digital (SD) Card Reader
- 3 Rear I/O includes (6) USB 2.0 ports, DisplayPort and VGA video interfaces, PS/2 mouse and keyboard ports, RJ-45 network interface, audio in/out jack
- 4 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 5 2.5" internal hard disk drive bay
- 6 135W 87% efficient external Power Adapter
- 7 HP USDT Tower Stand (sold separately)
- 8 HP Optical Mouse
- 9 HP Keyboard
- 10 HP Monitor (sold separately)

### Overview


### HP Compaq 8000 Elite Small Form Factor Business PC

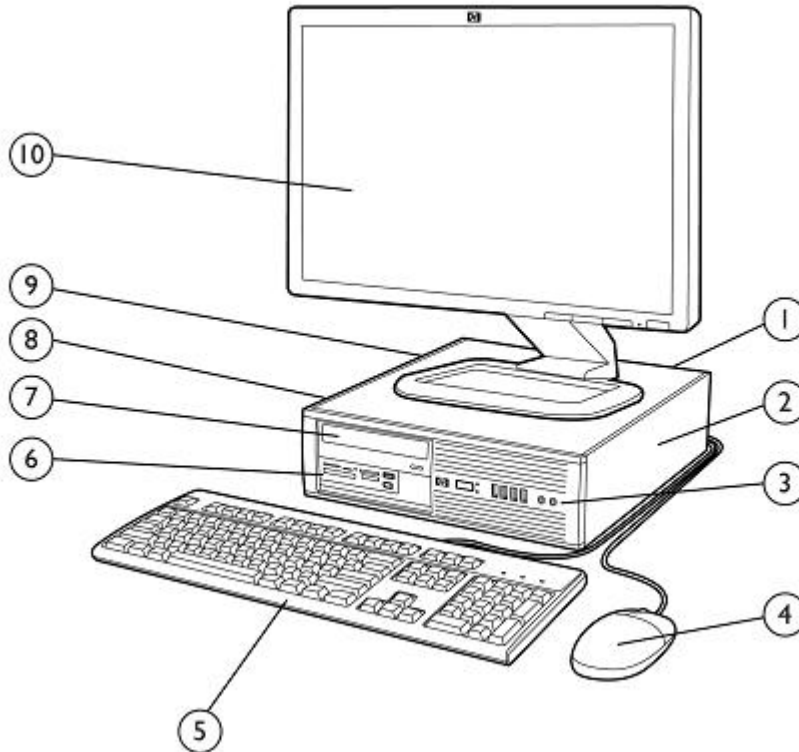

- 1 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort and VGA video interfaces, and audio in/out jacks
- 2 Low profile expansion slots include (1) PCI slot, (2) PCI Express x1 slots and (1) PCI Express x16 graphics slot
- 3 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 4 HP Optical Mouse
- 5 HP Keyboard
- 6 3.5" external drive bay supporting a media card reader or a secondary hard disk drive
- 7 5.25" external drive bay supporting an optical disk drive
- 8 3.5" internal drive bay supporting primary hard disk drive
- 9 240W standard or 89% high efficiency Power Supply
- 10 HP Monitor (sold separately)

### Overview

### HP Compaq 8000 Elite Convertible Minitower Business PC

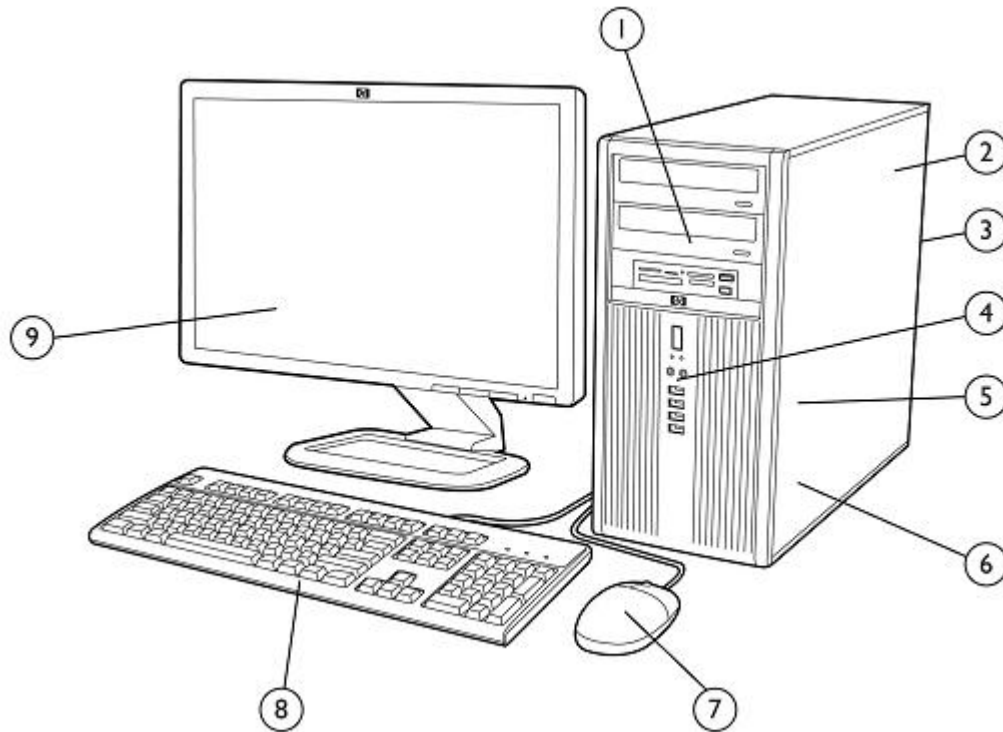

- 1 (3) 5.25" external drive bays supporting optical disk drives, removable hard disk drives, or the HP Media Card Reader
- 2 320W standard or 89% high efficiency Power Supply
- 3 Rear I/O includes (6) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort and VGA video interfaces, and audio in/out jacks
- 4 Front I/O includes (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack
- 5 (3) 3.5" internal drive bays supporting multiple hard disk drives
- 6 Full height expansion slots include (3) full-length PCI slots, (1) PCI Express x1 slot, and (2) full-length PCI Express x16 graphics slots  
**NOTE:** Second PCIe x16 slot has x4 connectivity.
- 7 HP Optical Mouse
- 8 HP Keyboard
- 9 HP Monitor (sold separately)

### Overview

#### At A Glance

- Designed for long-term deployment within corporate, enterprise, public sector and mid-market commercial organizations
- Choice of three professional chassis form factors to accommodate any desired mix between expandability and size
- BIOS developed and engineered by HP for better security, manageability and software image stability
- Intel® Q45 Express chipset featuring integrated GMA 4500 integrated graphics
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Intel® Core™ 2 Processor with vPro™ Technology (requires select processors)
- Supports industry standard management protocols including Intel Standard Manageability and DASH 1.1 (via optional Broadcom NIC card)
- Integrated dual independent monitor support via both a VGA and DisplayPort video interface
- Standard efficiency or 89% high efficiency energy saving power supplies available on the CMT and SFF models
- 87% efficient energy saving external power adapter standard with USDT models
- ENERGY STAR qualified models available (dependent upon the desired configuration)
- CMT and SFF models can be configured with multiple hard disk drives in a RAID array
- Guaranteed lengthy purchase lifecycles and image stability
- Software image fully compatible across all models and form factors
- Created using industry leading Design for Environment standards
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/business-site/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/97688-0-0-225-121.aspx>)
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Tool-less serviceability features for easier upgrades and repairs

### Standard Features and Configurable Components (availability may vary by country)

#### Operating Systems

<b>Preinstalled</b>	Genuine Windows 7 Home Basic Edition (32-bit) <sup>2</sup> Genuine Windows 7 Home Premium Edition (32-bit or 64-bit) <sup>2</sup> Genuine Windows 7 Professional Edition (32-bit or 64-bit) <sup>2</sup> FreeDOS
<b>Supported</b>	Genuine Windows Vista Enterprise Edition <sup>1</sup> Genuine Windows Vista Business (32-bit) <sup>1</sup> Genuine Windows Vista Home Basic <sup>1</sup> Genuine Windows 7 Enterprise Edition <sup>2</sup> Genuine Windows 7 Ultimate Edition <sup>2</sup>
<b>Certified</b>	Novell SUSE Linux Enterprise Desktop 11 <sup>†</sup> Red Hat Enterprise Linux 64 <sup>††</sup>

<sup>1</sup> Certain Windows Vista product features require advanced or additional hardware. See [www.microsoft.com/windowsvista/getready/hardwarereqs.mspx](http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx) and [www.microsoft.com/windowsvista/getready/capable.mspx](http://www.microsoft.com/windowsvista/getready/capable.mspx) for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: [www.windowsvista.com/upgradeadvisor](http://www.windowsvista.com/upgradeadvisor)

<sup>2</sup> System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

<sup>†</sup> The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- HP 22-in-1 Media Card Reader with PCI Card
- DisplayPort
- HP ProtectTools
- SATA Blu-ray Writer playback of commercial movies
- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet PCIe NIC Plus Card
- HP ADD2 SDVO PCIe DVI-D adapter
- 2<sup>nd</sup> serial port adapter (including low profile)
- Power Management features (US ENERGY STAR)

<sup>††</sup> The following features are not supported by Red Hat Enterprise Linux 64:

- HP 22-in-1 Media Card Reader with PCI Card
- Integrated 1.2 TPM Embedded Security Chip
- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet PCIe NIC Plus Card (DASH functionality)
- LSI PCEe x1 Hi-Speed 56K International SoftModem
- HP ADD2 SDVO PCIe DVI-D adapter
- HP FireWire / IEEE 1394 PCI Card (full height and low profile)
- 2<sup>nd</sup> serial port adapter (including low profile)
- HP Wireless 802.11b/g/n PCIe x1 Card
- HP USB Smartcard Keyboard

### Standard Features and Configurable Components (availability may vary by country)

- Power Management features (US ENERGY STAR)
- SATA Blu-ray Writer
- Broadcom NetXtreme Gigabit Ethernet Plus (DASH 1.1) PCIe NIC Card
- ATI Radeon HD 4550 Dual Head PCIe x16 Graphics Card
- ATI Radeon HD 4650 (1 GB DH) PCIe x16 Graphics Card
- NVIDIA GeForce 310 DP PCIe x16 Graphics Card
- Nvidia Quadro NVS 290 Graphics Card
- NVIDIA Quadro NVS 295 (256MB DH) PCIe x16 Graphics Card

---

### Value Added Software (included with all models; not included when configured with FreeDOS)

HP ProtectTools Security Suite  
HP Software Management Agent  
CompuTrace for Desktops agent (optional)

HP Insight Diagnostics  
PDF Complete

---

### Value Added Software (included with select models; not included when configured with FreeDOS)

Computer Setup Utility  
Antivirus software\*  
Roxio Creator Business  
HP Power Manager

HP Total Care Advisor  
Microsoft Office 2010 preloaded (purchase of a Product Key required to activate a full Office 2010 suite)\*\*  
Firefox HP Virtual Browser  
Corel WinDVD

\* May be Norton or McAfee antivirus software. First 60 days included. Subscription required for live updates thereafter. Internet access required.

\*\* Microsoft Office 2010 Preloaded includes reduced functionality versions of Word and Excel. Purchase of Product Key required to activate full Office 2010 suite available at participating resellers/retailers and <http://www.office.com>.

---

### HP Client Management Solutions (available for free download from the Internet)

<http://www.hp.com/go/easydeploy>

HP Client Automation Starter\*  
HP SoftPaq Download Manager

HP Client Catalog for Microsoft SMS  
HP Systems Software Manager

\* Available from your HP Sales Representative or HP Channel Partner

---

### Value Added Services and Features

HP Stable Platform Program  
Intel Stable Platform Program  
Business-to-Business Portals  
HP Global Series Services

Factory Express Deployment and Lifecycle Services  
Intel Standard Manageability  
Intel Core 2 Processor with vPro Technology  
Trusted Platform Module (TPM) v1.2\*

\* TPM module disabled where restricted by law, i.e. Russia.

---

### Service and Support

On-site warranty and service<sup>1</sup>: This limited warranty and service offering delivers parts, labour and on-site repair for terms up to 5 years. Response time is next business day<sup>2</sup> and includes free telephone support<sup>3</sup> 24 x 7. Global coverage<sup>2</sup> ensures any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/regions do not offer one year onsite and labour.

### Standard Features and Configurable Components (availability may vary by country)

<sup>1</sup> Terms and conditions may vary by country. Certain restrictions and exclusions apply.

<sup>2</sup> On-site services may be provided pursuant to a service contract between HP and an authorized HP third party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

<sup>3</sup> Technical telephone support applies only to HP configured, HP and HP qualified third party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Chipset	USDT	SFF	CMT
Intel Q45 Express with Intel GMA 4500 Graphics	X	X	X

Processor	USDT	SFF	CMT
<b>Intel Celeron Processors</b>			
<u>Intel Celeron E3200 Processor</u> 2.40 GHz, 1M L2 cache, 800 MHz FSB	X	X	X
<u>Intel Celeron E3300 Processor</u> 2.50 GHz, 1M L2 cache, 800 MHz FSB	X	X	X
<u>Intel Celeron E3500 Processor</u> 2.70 GHz, 1M L2 cache, 800 MHz FSB	X	X	X
<b>Intel Pentium Processors:</b>			
<u>Intel Pentium E5300 Processor</u> 2.60 GHz, 2M L2 cache, 800 MHz FSB	X	X	X
<u>Intel Pentium E5400 Processor</u> 2.70 GHz, 2M L2 cache, 800 MHz FSB	X	X	X
<u>Intel Pentium E5700 Processor</u> 3.00 GHz, 2M L2 cache, 800 MHz FSB	X	X	X
<u>Intel Pentium E6300 Processor</u> 2.80 GHz, 2M L2 cache, 1066 MHz FSB	X	X	X
<u>Intel Pentium E6500 Processor</u> 2.93 GHz, 2M L2 cache, 1066 MHz FSB	X	X	X
<u>Intel Pentium E6800 Processor</u> 3.33 GHz, 2M L2 cache, 1066 MHz FSB	X	X	X
<b>Intel Core 2 Duo Processors:</b>			
<u>Intel Core 2 Duo E7500 Processor</u> 2.93 GHz, 3M L2 cache, 1066 MHz FSB	X	X	X
<u>Intel Core 2 Duo E7600 Processor</u> 3.06 GHz, 3M L2 cache, 1066 MHz FSB	X	X	X
<u>Intel Core 2 Duo E8400 Processor</u> 3.0 GHz, 6M L2 cache, 1333 MHz FSB with vPro Technology	X	X	X
<u>Intel Core 2 Duo E8500 Processor</u> 3.16 GHz, 6M L2 cache, 1333 MHz FSB with vPro Technology	X	X	X
<u>Intel Core 2 Duo E8600 Processor</u> 3.33 GHz, 6M L2 cache, 1333 MHz FSB with vPro Technology	X	X	X

### Standard Features and Configurable Components (availability may vary by country)

#### Intel Core 2 Quad Processors:

<u>Intel Core 2 Quad Q8400 Processor</u> 2.66 GHz, 4M L2 cache, 1333 MHz FSB	X	X
<u>Intel Core 2 Quad Q8400s Processor (low power)</u> 2.66 GHz, 4M L2 cache, 1333 MHz FSB	X	
<u>Intel Core 2 Quad Q9500 Processor</u> 2.83 GHz, 6M L2 cache, 1333 MHz FSB	X	X
<u>Intel Core 2 Quad Q9505 Processor</u> 2.83 GHz, 6M L2 cache, 1333 MHz FSB with vPro Technology	X	X
<u>Intel Core 2 Quad Q9505s Processor (low power)</u> 2.83 GHz, 6M L2 cache, 1333 MHz FSB with vPro Technology	X	
<u>Intel Core 2 Quad Q9550 Processor</u> 2.83 GHz, 12M L2 cache, 1333 MHz FSB with vPro Technology	X	X
<u>Intel Core 2 Quad Q9550s Processor (low power)</u> 2.83 GHz, 12M L2 cache, 1333 MHz FSB with vPro Technology	X	
<u>Intel Core 2 Quad Q9650 Processor</u> 3.0 GHz, 12M L2 cache, 1333 MHz FSB with vPro Technology	X	X

#### Intel Core 2 Processor with vPro Technology

All HP Compaq 8000 Elite Series models featuring this technology include processors which are part of the Intel 2010 Stable Image Platform Program (SIPP) designed to ensure the stability promise inherent in the value proposition of the HP Compaq 8000 Elite Series Business PC, thus making these models the most stable, secure, and manageable platforms available to enterprises today

The 2010 SIPP processors are:

- Core 2 Duo E8400, E8500, E8600
- Core 2 Quad Q9505, Q9505s, Q9550, Q9550s, Q9650

Intel's Core 2 Processor with vPro Technology suite of features includes:

**Intel Advanced Management Technology (AMT) v5.0** – An advanced set of remote management features and functionality which provides network administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 5.0 includes all features described as part of Intel Standard Manageability plus the following advanced management functions:

- Fast Call for Help – a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection
- Remote Scheduled Maintenance – pre-schedule when the PC connects to the IT or service provider console for maintenance. Remote PCs can get required patches, be inventoried, etc by connecting to their IT console or Service Provider when it's convenient
- Remote Alerts – automatically alert IT or service provider if issues arise
- Access Monitor – Provides oversight into Intel® AMT actions to support security requirements

**Microsoft NAP Support** – Allows AMT 5.0 to gain access to a Microsoft NAP enabled 802.1x network OOB to enable OOB SW updates, inventories, remote diagnostics, etc. NAP is a new platform and solution that controls access to network resources based on a client computer's identity and compliance with corporate governance policy. NAP allows network administrators to define granular levels of network access based on who a client is, the groups to which the client belongs, and the degree to which that client is compliant with corporate governance policy. If a client is not compliant, NAP provides a mechanism to automatically bring the client back into



### Standard Features and Configurable Components (availability may vary by country)

compliance and then dynamically increase its level of network access.

When a client attempts to access the network or communicate on the network, it must present its system health state or proof of health compliance. If a client cannot prove it is compliant with system health requirements (for example, that it has the latest operating system and antivirus updates installed), its access to the network or communication on the network can be limited to a restricted network containing server resources so that health compliance issues can be remedied. After the updates are installed, the client requests access to the network or attempts the communication again. If compliant, the client is granted unlimited access to the network or the communication is allowed.

---

### Redundant Array of Independent Drives (RAID)

#### Flexible implementation:

- DriveLock is supported while in RAID mode. Users can manage the DriveLock password from within F10 Setup. Locked drives will be displayed as such in the RAID option ROM interface.
- Hard drive information can be viewed within F10 Setup while in RAID mode. Previously, the hard drives will not appear in Drive Configuration when switching to RAID mode.
- DPS Self Test can be executed on physical hard drives while in RAID mode.
- The RAID Setup Utility (accessed through CTRL-I) can be protected by the F10 Setup password.

#### NOTE:

RAID 1 is the only RAID configuration offered via factory configurations. The pre-configured systems:

- Are only available on the CMT and SFF form factors. The USDT does not support RAID as it does not allow for more than one hard disk drive.
- Are complete RAID systems and have both drives installed. If the CMT is configured with three hard disk drives, the third drive is would be unpartitioned and not part of the RAID array
- Have the necessary Option ROM configuration.
- Are pre-loaded and pre-installed with all required Intel software.
- Include a preinstalled operating system that is mirrored mode out of the box.

Please refer to the HP White Paper titled “Advanced Host Controller Interface (AHCI) and Redundant Array of Independent Disks (RAID) on HP Compaq 8000 Elite Series PCs” at: <http://www.hp.com> for more information and instructions.

---

### Standard Features and Configurable Components (availability may vary by country)

#### DDR3 Synchronous DRAM NON-ECC System Memory

Memory upgrades are accomplished by adding single or multiple DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations. The HP Compaq 8000 Elite Series PC supports non-ECC DDR3 PC3-10600 (1333 MHz) and PC3-8500 (1066 MHz) memory.

**CAUTION:** You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

#### Memory Configurations: Ultra Slim Desktop

Maximum Memory\* Supports up to 8 GB of DDR3 SDRAM using SO-DIMM modules. Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

**NOTE:**

For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements.

Total Memory	Slot	
	Channel A (black)	Channel B (white)
1 GB	1 GB	
2 GB (dual channel symmetric)	1 GB	1 GB
4 GB (dual channel symmetric)	2 GB	2 GB
8 GB (dual channel symmetric)	4 GB	4 GB

\* The Intel Q45 Express chipset includes a built-in Management Engine (ME), which allocates memory for manageability functions. Management Engine memory is shared with system memory. If the PC contains a single SO-DIMM, 16 MB of memory is pre-allocated for it at system startup. If the PC contains two SO-DIMMs, 32 MB of memory is pre-allocated. This memory is not made available to the operating system, just as pre-allocated video memory is not available.

### Standard Features and Configurable Components (availability may vary by country)

#### Memory Configurations: Small Form Factor and Convertible Minitower

**Maximum Memory\***

Supports up to 16 GB of DDR3 SDRAM using DIMM modules. Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

**NOTE:**

For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

**NOTE:**


The Q45 chipset Graphics Memory Controller Hub (GMCH) supports DDR3 memory technology up to a maximum of 1066 MHz. Therefore, systems configured with PC3-10600 (1333 MHz) memory DIMMs will operate at 1066 MHz.

Total Memory	Slot			
	Channel A		Channel B	
	1 (black)	2 (white)	3 (white)	4 (white)
1 GB	1 GB			
2 GB (dual channel symmetric)	1 GB		1 GB	
4 GB (dual channel symmetric)	1 GB	1 GB	1 GB	1 GB
8 GB (dual channel symmetric)	2 GB	2 GB	2 GB	2 GB
16 GB (dual channel symmetric)	4 GB	4 GB	4 GB	4 GB


**NOTE:** The Intel Q45 Express chipset includes a built-in Management Engine (ME), which allocates memory for manageability functions. Management Engine memory is shared with system memory. If the PC contains a single SO-DIMM, 16 MB of memory is pre-allocated for it at system startup. If the PC contains two SO-DIMMs, 32 MB of memory is pre-allocated. This memory is not made available to the operating system, just as pre-allocated video memory is not available.

Standard Features and Configurable Components (availability may vary by country)


### Ultra-slim Desktop

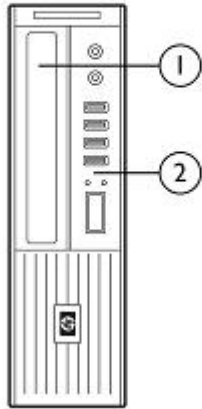

### Small Form Factor

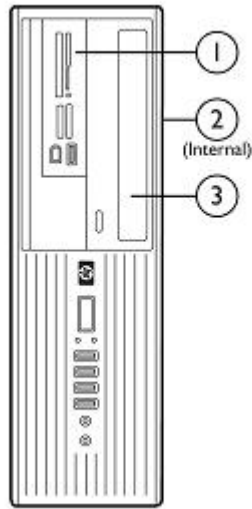

### Convertible Minitower

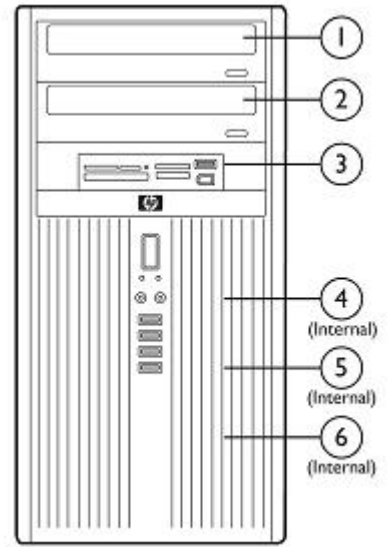

### Storage - Drive Support

	Ultra Slim Desktop			Small Form Factor			Convertible Minitower		
	SDR	ODD	HDD	MCR	ODD	HDD	MCR	ODD	HDD
Quantity Supported	1	1	1	1	1	2	1	2	3
Position	1	2	3	1	3	2,1	3	1,2	4,5,6

### Data Storage Drives

USDT    SFF    CMT

#### 250-GB Hard Disk Drives

250GB 2.5" Hard Disk Drive  
7,200 rpm, 8MB cache, 3.0 GB/s, NCQ, Smart IV

X

250GB 3.5" Hard Disk Drive  
7,200 rpm, 8MB cache, 3.0 GB/s, NCQ, Smart IV

X    X

250GB Removable Hard Disk Drive  
7,200 rpm, 8MB cache, 3.0 GB/s, NCQ, Smart IV

X    X

#### 500-GB Hard Disk Drives

500GB 3.5" Hard Disk Drive  
7,200 rpm, 16MB cache, 3.0 GB/s, NCQ, Smart IV

X    X

500GB Removable Hard Disk Drive  
7,200 rpm, 16MB cache, 3.0 GB/s, NCQ, Smart IV

X    X

#### 1-TB Hard Disk Drives

1 TB 3.5" Hard Disk Drive  
7,200 rpm, 16MB cache, 3.0 GB/s, NCQ, Smart IV

X    X

### Standard Features and Configurable Components (availability may vary by country)

#### Solid State Drives

64GB 2.5" Solid State Drive	X	X	X
80-GB 2.5" Solid State Drive	X	X	X

#### Optical Disc Drives

DVD-ROM Drive <sup>1</sup>		X	X
Slimline DVD-ROM Drive <sup>1</sup>	X		
SuperMulti DVD Writer Drive <sup>1,2,3</sup>		X	X
Slimline SuperMulti DVD Writer Drive <sup>1,2,3</sup>	X		
Blu-Ray Writer Drive		X	X

<sup>1</sup>For playing DVDs, Corel WinDVD 8

<sup>2</sup>For writing CDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

<sup>3</sup>For writing CDs and DVDs, video editing and authoring DVDs, choice of Sonic/Roxio Easy Media Creator 9 or Roxio Business Creator 10

#### Media Card Readers

Media Card Reader (22-in-1)		X	X
Media Card Reader (22-in-1) with 1394 port		X	X
Secure Digital (SD) HC Reader	X		

#### Security Solutions and Capabilities

	USDT	SFF	CMT
Trusted Platform Module (TPM) 1.2 <sup>1</sup>	X	X	X
Stringent Security (via BIOS) <sup>2</sup>	X	X	X
SATA Port Disablement (via BIOS)	X	X	X
Drive Lock	X	X	X
RAID Configurations		X	X
HP ProtectTools Embedded Security Software	X	X	X
Serial, Parallel, USB enable/disable (via BIOS)	X	X	X
Optional USB Port Disable at factory (user configurable via BIOS)	X	X	X
Removable Media Write/Boot Control	X	X	X
Power-On Password (via BIOS)	X	X	X
Setup Password (via BIOS)	X	X	X
Solenoid Hood Lock / Sensor		X	X
Hood Sensor	X		
Support for chassis padlocks and cable lock devices	X	X	X

<sup>1</sup>TPM module disabled where use is restricted by law; for example, Russia.

<sup>2</sup>This setting is defaulted to disable, but when enabled, the PW jumper will not clear the BIOS pre-boot authentication passwords.

### Standard Features and Configurable Components (availability may vary by country)

#### Network Interface Connection

	USDT	SFF	CMT
Intel 82567LM GbE Network Connection (integrated)	X	X	X
Intel Gigabit CT Desktop NIC Card		X	X
Broadcom NetXtreme GbE Ethernet Plus NIC (PCIe x1)		X	X
HP 802.11 b/g/n Wireless NIC (PCIe x1)		X	X
Intel Wi-Fi Link 5100 a/b/g/n Wireless NIC (mini PCI)	X		

**NOTE:** These wireless network interface solutions will disable the vPro Technology features.

#### Modem

	USDT	SFF	CMT
LSI Hi-Speed 56K International Soft Modem (PCIe x1)		X	X

#### Graphics

	USDT	SFF	CMT
Intel Graphics Media Accelerator 4500 (integrated)	X	X	X
Nvidia GeForce 310 DP PCIe x16 Graphics Card		X	X
Nvidia Quadro NVS 290 Graphics Card		X	X
Nvidia Quadro NVS 295 Graphics Card		X	X
NVIDIA NVS 300 PCIe x16 512MB Graphics Card		X	X
NVIDIA NVS 300 PCIe x1 512MB Graphics Card		X	X
ATI Radeon HD 4550 Graphics Card*		X	X
ATI Radeon HD 4650 DP (1GB) PCIe x16 Graphics Card		X	X
HP ADD2 SDVO + DVI-D Video Adapter		X	X

HP DisplayPort to DVI-D Adapter	X	X	X
HP DisplayPort to VGA Adapter	X	X	X
HP DisplayPort to HDMI Adapter	X	X	X
HP DisplayPort Cable	X	X	X

\* When ordered with an Nvidia Quadro NVS 295 card, the PC is shipped with two DisplayPort to VGA Adapters. When an Nvidia Quadro NVS 295 card is purchased as an after-market option, it comes with two DisplayPort to DVI-D Adapters.

#### Multi-Media

	USDT	SFF	CMT
High Definition Audio with Realtek ALC261 codec (all ports are stereo)	X	X	X
Microphone/Headphone* and dedicated headphone front ports	X	X	X
Line-out and Line-In rear Ports*	X	X	X
Multi-streaming capable*	X	X	X
Internal Speaker (standard)	X	X	X
HP Thin USB Powered Speakers(optional)	X	X	X
HP TV Tuner Mini PCIe Card	X		
HP TV Tuner PCIe x1 Card		X	X

### Standard Features and Configurable Components (availability may vary by country)

\* The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone . Rear audio input ports are re-taskable as Line-in or Microphone-in. External speakers must be powered externally. Multistreaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

---

#### Input Devices

	USDT	SFF	CMT
PS/2 Standard Keyboard	X	X	X
USB Standard Keyboard	X	X	X
USB CCID SmartCard Keyboard	X	X	X
USB Mini Keyboard	X	X	X
USB and PS/2 Washable Keyboard	X	X	X

---

PS/2 Optical Scroll Mouse	X	X	X
USB Optical Scroll Mouse	X	X	X
USB Laser Scroll Mouse	X	X	X
USB and PS/2 Washable Mouse	X	X	X

---

#### Miscellaneous

	USDT	SFF	CMT
FireWire (IEEE 1394) Card		X	X
Serial Port Adapter (RS-232 compatible)		X	X
Parallel Port Adapter		X	X
eSATA Port Adapter		X	X
PC Tower Stand	X	X	
Configure CMT in desktop orientation			X
Rear Port/Cable Control Cover	X		

After-Market Options (availability may vary by region)

Communications Devices	USDT	SFF	CMT	Part Number
HP Wireless 802.11 b/g/n NIC Card		X	X	FH971AA
Broadcom NetXtreme GbE Ethernet Plus NIC Card		X	X	FS215AA
Intel Gigabit CT Desktop NIC Card		X	X	FH969AA
LSI Hi-Speed 56K Int'l Soft Modem Card		X	X	FH970AA
RJ11 Modem Adapter Kit		X	X	DC131C

**Note:**

The use of a NIC Card (wired or wireless) will disable the vPro Technology features.

Graphics Solutions	USDT	SFF	CMT	Part Number
ATI Radeon HD 4550 Graphics Card		X	X	AT042AA
ATI Radeon HD 4650 DP (1GB) PCIe x16 Graphics Card			X	VN566AA
Nvidia Quadro NVS 290 PCIe x16 Graphics Card		X	X	KG748AA
Nvidia Quadro NVS 290 PCIe x1 Graphics Card		X		KN586AA
Nvidia Quadro NVS 295 Graphics Card		X	X	FY943AA
NVIDIA NVS 300 PCIe x16 512MB Graphics Card		X	X	BV456AA
NVIDIA NVS 300 PCIe x1 512MB Graphics Card		X	X	BV457AA
Nvidia GeForce 310 DP PCIe x16 Graphics Card		X	X	VG885AA
HP ADD2 SDVO + DVI-D Video Adapter		X	X	DY674A

DMS59 DVI Dual-head Connector Cable		X	X	DL139A
HP DVI to DVI cable		X	X	DC198A
HP DisplayPort To DVI-D adapter	X	X	X	FH973AA
HP DisplayPort To DL DVI-D adapter	X	X	X	NR078AA
HP DisplayPort to VGA Adapter	X	X	X	AS615AA
HP DisplayPort Cable Kit	X	X	X	VN567AA

Hard Disk Storage Drives	USDT	SFF	CMT	Part Number
HP 250GB SATA NCQ SMART IV Hard Disk Drive		X	X	PY278AA
HP 500GB SATA NCQ SMART IV Hard Disk Drive		X	X	KW347AA

HP 64-GB Solid State Drive	X	X	X	VG679AA
HP 80-GB Solid State Drive	X	X	X	BM848AA

HP eSATA Adapter		X	X	FH966AA
HP Removable SATA Hard Drive Enclosure (frame & carrier)		X	X	RY102AA
HP Removable SATA Hard Drive Enclosure (Carrier Only)		X	X	RY103AA



### After-Market Options (availability may vary by region)

<b>Input Devices</b>	<b>USDT</b>	<b>SFF</b>	<b>CMT</b>	<b>Part Number</b>
HP PS/2 Standard Keyboard	X	X	X	DT527A
HP USB Standard Keyboard	X	X	X	DT528A
HP USB Mini Keyboard	X	X	X	AS601AA
HP USB Gray Keyboard	X	X	X	DT529A
HP USB SmartCard Keyboard	X	X	X	ED707AA
HP USB Keyboard and Mouse Kit	X	X	X	RC465AA
<hr/>				
HP USB Washable Keyboard	X	X	X	VF097AA
HP USB and PS/2 Washable Mouse	X	X	X	BM866AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	X	X	X	BU207AA
<hr/>				
HP PS/2 Optical Scroll Mouse	X	X	X	EY703AA
HP USB Optical Scroll Mouse	X	X	X	DC172AT
HP USB Laser Mouse	X	X	X	GW405AT
HP USB Travel Mouse	X	X	X	RH304AA
<hr/>				
HP 2.4GHz Wireless Keyboard and Mouse	X	X	X	NB896AA
<hr/>				
<b>System Memory</b>	<b>USDT</b>	<b>SFF</b>	<b>CMT</b>	<b>Part Number</b>
1 GB DIMM		X	X	AT023AA
2 GB DIMM		X	X	AT024AA
4 GB DIMM		X	X	VH638AA
1 GB SO-DIMM	X			VH639AA
2 GB SO-DIMM	X			VH640AT
4 GB SO-DIMM	X			VH641AT
<hr/>				
<b>Multimedia Devices</b>	<b>USDT</b>	<b>SFF</b>	<b>CMT</b>	<b>Part Number</b>
HP Thin USB Powered Speakers	X	X	X	KK912AA
<hr/>				
DVD-ROM Drive		X	X	AR629AA
SuperMulti Drive		X	X	AR630AA
Blu-Ray Writer Drive		X	X	AR482AA
DVD-ROM Drive (Slimline)	X			VP033AA
SuperMulti Drive (Slimline)	X			VP034AA
<hr/>				

### After-Market Options (availability may vary by region)

#### Removable Media Storage

	USDT	SFF	CMT	Part Number
HP USB External Diskette Drive	X	X	X	DC141B
HP Media Card Reader (22-in-1)		X	X	AR941AA
HP Media Card Reader (22-in-1) with FireWire (IEEE 1394)		X	X	AR942AA

#### Security Devices

	USDT	SFF	CMT	Part Number
HP/Kensington MicroSaver Cable Lock	X	X	X	PC766A
HP Business PC Security Lock	X	X	X	PV606AA
HP USDT Rear Port Controller Cover	X			VN571AA
HP SFF Solenoid Lock and Hood Sensor		X		BP428AA
HP CMT Solenoid Lock and Hood Sensor			X	DE618A
HP SFF Wall Mount/Security Sleeve		X		VN570AA

#### HP Client Automation Software

	USDT	SFF	CMT	Part Number
HP Client Automation – Standard Edition (single seat)	X	X	X	T3488AA
HP Client Automation – Standard Edition (10 seats)	X	X	X	TA599AA
HP Client Automation – Standard Edition (100 seats)	X	X	X	TA600AA
HP Client Automation – Standard Edition (500 seats)	X	X	X	TA601AA
HP Client Automation – Standard Edition (1,000 seats)	X	X	X	T3489AA

#### Stands and Accessories

	USDT	SFF	CMT	Part Number
HP Integrated Work Centre Stand	X			GN783AA
HP USDT Tower Stand	X			VN568AA
HP SFF Tower Stand		X		VN569AA
HP Integrated Work Centre – Small Form Factor		X		QK549AA
HP Serial Port Adapter (RS-232 compatible)		X	X	PA716A
HP Parallel Port Adapter		X	X	KD061AA
HP 5.25" Blank Bezel Kit (50 pack)		X	X	DC177B
HP FireWire (IEEE 1394) Card		X	X	PA997A

### Technical Specifications

<b>Weights and Dimensions (configured with 1 HDD and 1 ODD)</b>	<b>Ultra-slim Desktop</b>	<b>Small Form Factor</b>	<b>Convertible Minitower</b>
Chassis (H x W x D)	2.6 x 9.9 x 10 in 66 x 251.5 x 254 mm	3.95 x 13.30 x 14.9 in 100 x 338 x 378.5 mm	17.63 x 7.00 x 17.5 in 447.8 x 177.8 x 444.5 mm
System Volume	257.5 cu in 4.22 L	782.77 cu in 12.8 L	2160 cu in 35.4 L
Tower Stand (H x W x D)	1.07 x 4.92 x 6.69 in 27.2 x 124.9 x 169.9 mm	1.12 x 7.01 x 7.87 in 28.5 x 178 x 200 mm	N/A
Packaging (H x W x D)	8.60 x 15.68 x 19.68 in 218.4 x 398.3 x 499.9 mm	9.00 x 19.68 x 23.38 in 228.6 x 499.9 x 593.85 mm	22.64 x 12.72 x 24.41 in 575.0 x 323 x 620 mm
System Weight	6.75 lb 3.07 kg	16.72 lb 7.6 kg	24.54 lb 11.15 kg
Shipping Weight	14.42 lb 6.54 kg	17.86 lb 8.1 kg	34.0 lb 15.42 kg
Max Supported Weight (desktop orientation)	77 lb 35 kg	77 lb 35 kg	77 lb 35 kg
<b>I/O Ports</b>			
	<b>Ultra-slim Desktop</b>	<b>Small Form Factor</b>	<b>Convertible Minitower</b>
USB 2.0	Front – four (4) ports Rear – six (6) ports		
Serial	N/A	one RS-232 compatible port standard second port available optionally	
Parallel	N/A	one port available as an option	
eSATA	N/A	one port available as an option	
PS/2	colour coded support for keyboard (purple) and mouse (green)		
Video	VGA and DisplayPort provide integrated dual independent monitor support		
DVI output	available via optional DisplayPort to DVI Adapter		
Audio	Front – microphone & headphone Rear – line input (supports microphone or line input), line out  <b>Note:</b> <a href="#">See Audio/Visual section for information on re-taskable audio ports</a>		
NIC	Industry standard RJ-45 port accesses the integrated network interface controller		
<b>Slots</b>			
	<b>Ultra-slim Desktop</b>	<b>Small Form Factor</b>	<b>Convertible Minitower</b>
Type and quantity	(1) mini PCI Express	(1) PCI (2) PCI Express x1 (1) PCI Express x16	(3) PCI (1) PCI Express x1 (half-length) (2) PCI Express x16
Slot specifications		Low profile – 2.5” Length: 6.6” 25W maximum	Full height – 4.2”  Primary x16 slot supports 75W or 35W card  Secondary x16 slot supports

### Technical Specifications

			35W card Secondary slot functions electrically as a x4 slot
PCI	N/A	(1)	(3) 25W max. power
PCI Express x16	N/A	(1)	(2) 75W max. power (primary) 35W max. power (secondary)
PCI Express x1	N/A	(2) 10W max. power	(1) 10W max. power
<b>Bays</b>	<b>Ultra-slim Desktop</b>	<b>Small Form Factor</b>	<b>Convertible Minitower</b>
3.5" external	N/A	1 bay available for Media Card Reader unless used for a secondary hard drive	N/A
5.25" external	N/A	1 bay – 8.19" depth	3 bays Top two bays accept drives up to 8.19" depth Bottom bay accepts drives up to 5.7" depth
Slimline	1 bay for ODD	N/A	N/A
Secure Digital (SD) Reader	SD Reader or blank	N/A	N/A
Internal Drive Bays	1 bay for 2.5" drive	1 bay for 3.5" drive	3 bays for 3.5" drives
<b>Controller</b>	<b>Ultra-slim Desktop</b>	<b>Small Form Factor</b>	<b>Convertible Minitower</b>
Hard Drive Controller	Serial ATA Supports SATA 1.5-GB/s and 3.0-GB/s		
SATA Interfaces	(1) Total	(4) Total: (3) common SATA (1) eSATA	(5) Total: (4) common SATA (1) eSATA
Host SATA Controller	Advanced Host Controller Interface (AHCI) Revision 1.2. The specification includes a description of the hardware/software interface between system software and the host controller hardware.		

### Technical Specifications

Unit Environment and Operating Conditions	
General Unit Operating Guidelines	
<ul style="list-style-type: none"> <li>Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.</li> <li>Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.</li> <li>Never restrict airflow into the computer by blocking any vents or air intakes.</li> <li>Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.</li> <li>Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.</li> <li>If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.</li> </ul>	
Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F(-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude ( unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)
*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.	

Power Supply	Ultra Slim Desktop	Small Form Factor	Convertible Minitower
Standard Efficiency	N/A	240W active PFC	320W active PFC
High Efficiency*	135W active PFC 87% efficient	240W active PFC 87/89/85% efficient at 20/50/100% load	320W active PFC 87/89/85% efficient at 20/50/100% load
Operating Voltage Range	90 – 264 VAC	90 – 264 VAC	90 – 264 VAC
Rated Voltage Range	100 – 240 VAC	100 – 240 VAC	100 – 240 VAC
Rated Line Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Operating Line Frequency Range	47 – 63 Hz	47 – 63 Hz	47 – 63 Hz
Rated Input Current	N/A	4A	5.5A
Rated Input Current with Energy Efficient* Power Supply	2.4A	4A	5.5A
Current Leakage (NFPA 99)	< 250 µA	< 275 µA	< 450 µA
Power Supply Fan	N/A	92mm variable speed	92mm variable speed
Power Cord Length	N/A	6 ft (1.83 m)	6 ft (1.83 m)
External Power Adapter			
Dimensions	6.7 x 2.6 x 1.5 in	N/A	N/A
Total Cord Length	12 ft 8 in	N/A	N/A
*High efficiency power supply is a requirement for ENERGY STAR qualification in conjunction with a select range of processors and modules			

### Technical Specifications

#### ROM BIOS Information

Key features of the HP BIOS include:

- Deployment and manageability – HP BIOS provides several technologies that help integrate the HP Elite PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Select models feature either Intel Standard Manageability or Core 2 processor with vPro Technology.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Computrace agent – For tracking and tracing services, available in select countries, separate software and purchase of a subscription is required.
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (Flashbin), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.

#### Additional HP BIOS Features

- Power-On password – Helps prevent an unauthorized user from powering on the system.
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Elite models use ACPI to provide power conservation features.
- S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

#### Other Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- System Management BIOS v2.6
- Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

### Technical Specifications

Serviceability Features
<ul style="list-style-type: none"> <li>● Dual colored power LED on front of computer to indicate either normal or fault condition</li> <li>● Diagnostic LED Explanation Table:               <ul style="list-style-type: none"> <li>○ Number of 1-second red LED blinks followed by a 2-second pause, then repeats:                   <ul style="list-style-type: none"> <li>■ 2 – processor thermal protection activated</li> <li>■ 3 – processor not installed</li> <li>■ 4 – power supply failure</li> <li>■ 5 – memory error</li> <li>■ 6 – video error</li> <li>■ 7 – PCA failure (ROM detected failure prior to video)</li> <li>■ 8 – invalid ROM, bootblock recovery mode</li> <li>■ 9 – system not fetching code</li> <li>■ 10 – system hang while loading an option ROM</li> </ul> </li> </ul> </li> <li>● System/Emergency ROM</li> <li>● Flash ROM</li> <li>● CMOS Battery Holder for easy replacement</li> <li>● Flash Recovery with Video Configuration Record Software</li> <li>● 5 Aux Power LED on System PCA</li> <li>● Processor ZIF Socket for easy Upgrade</li> <li>● Over-Temp Warning on Screen (Requires IM Agents)</li> <li>● Clear Password Jumper</li> <li>● DIMM Connectors for easy Upgrade</li> <li>● Clear CMOS Button</li> <li>● NIC LEDs (integrated) (Green &amp; Amber)</li> <li>● Dual Color Power and HD LED – To Indicate Normal Operations and Fault Conditions</li> <li>● Color coordinated cables and connectors</li> <li>● Tool-less Hood Removal</li> <li>● Front power switch</li> <li>● System memory can be upgraded without removing the system board or any internal components</li> <li>● Tool-less Hard Drive, CD &amp; Diskette Removal</li> <li>● Green Pull Tabs, and Quick Release Latches for easy Identification</li> </ul> <p><b>Note:</b> thumb screw release mechanism is used with the Ultra-slim Desktop chassis cover.</p>

Additional Features	Description
Intel® Standard Manageability*	<ul style="list-style-type: none"> <li>● Requires the utilization of the integrated network connection</li> <li>● Available with selected processors not part of the Intel Stable Intel Platform Program (SIPP)</li> <li>● Intel Advanced Management Technology (AMT) v3.2</li> <li>● Basic PC management capabilities such as asset inventory, HW alerting, SOL/IDE-R, remote configuration, agent presence and system defense.</li> <li>● DASH 1.1 compliance. Support for profile updates.</li> <li>● Host VPN support for local management VPN tunneling</li> </ul>
<p>* PCs with Intel Standard Manageability include features of Intel Active Management Technology (Intel AMT). Intel AMT requires the computer system to have an Intel AMT-enabled chipset, network hardware and software, as well as connection with a power source and a corporate network connection. Setup requires configuration by the purchaser and may require scripting with the management console or further integration into existing security frameworks to enable certain functionality. For more information, see <a href="http://www.intel.com/technology/platform-technology/intel-amt/">http://www.intel.com/technology/platform-technology/intel-amt/</a>.</p>	
Intel Core 2 Processor with vPro Technology	<ul style="list-style-type: none"> <li>● Requires the utilization of the integrated network connection</li> </ul>

### Technical Specifications

	<ul style="list-style-type: none"> <li>• Available with selected processors which are part of the Intel Stable Intel Platform Program (SIPP)</li> <li>• Intel Advanced Management Technology (AMT) v5.0</li> <li>• Intel Standard Manageability technologies (see above for a list of features)</li> <li>• Fast Call for Help – client outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection</li> <li>• Audit Logs – policy based log of AMT actions to deter rogue administrator actions</li> <li>• Microsoft NAP Support – allows AMT to gain access to a Microsoft NAP enabled 802.1x network OOB to enable OOB SW updates, inventories, remote diagnostics, etc.</li> <li>• Remote Scheduled Maintenance – Pre-schedule when the PC connects to the IT or service provider console for maintenance</li> <li>• Remote Alerts – automatically alert IT or service provider if issues arise</li> <li>• Access Monitor – Provides oversight to support security requirements</li> </ul>
DASH 1.1 support (Desktop and Mobile Architecture for System Hardware)	A standards initiative for representing out-of-band management capability for computer systems. It is a secure, web-services based successor to ASF.
ASF 2.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
TXT (Trusted Execution Technology) and VT-d (Virtualized devices)	<p>TXT allows for secure management (via TPM) and measured launch of VMM, as well as teardown of secrets in unexpected reset case. TXT support provided in select Intel processors</p> <p>VT-d is a chipset technology that virtualizes directed I/O</p> <p>Together, TXT and VT-d may be used to support verified launch of a known trusted VMM that also may protect VMs from accessing each other's memory.</p>
Computrace	Computrace agent support standard
Towerable Orientation	Product can be oriented as either a desktop or a tower
Drive Lock	Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.
Drive Protection System	<p>DPS Access through F10 Setup during Boot</p> <p>A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user</p> <p>Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure.</p> <p>It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced.</p> <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures.</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted
SMART I – Drive Failure Prediction	Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count
SMART II – Off-Line Data Collection	By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure
SMART III – Off-Line Read Scanning with Defect Reallocation	IOEDC: I/O Error Detection Circuitry



### Technical Specifications

Perfect Read/Write

Perfect Read/Write	Detects errors in Read/Write buffers on HDD cache RAM
--------------------	---

SMART IV – End-to-End CRC for hard drives

SMART IV – End-to-End CRC for hard drives	Interface in F10 setup provides confirmation of SMART IV support.
---	---

### Technical Specifications - Audio

#### High Definition Audio

<b>Type</b>	Integrated
<b>HD Stereo Codec</b>	Realtek 4-channel ALC261 codec Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load)
<b>Audio I/O Ports</b>	Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal.
<b>Internal Speaker Amplifier</b>	For the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In.
<b>Multistreaming Capable</b>	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
<b>Sampling</b>	8 kHz – 192 kHz
<b>Wavetable Syntheses (software)</b>	Yes – Uses OS soft wavetable
<b>Analog Audio</b>	Yes
<b># of Channels on Line-Out (mono/stereo)</b>	Stereo (Left & Right channels)
<b>Internal Audio Speaker Power Rating</b>	1.5 W
<b>Internal Speaker</b>	Yes
<b>External Speaker Jack (Line-Out)</b>	Yes

#### Note:

The audio ports/jacks provided by all of our systems are 3.5mm in diameter. This would include both the front jacks and rear jacks, for audio in/out, mic in and headphone out.

### Technical Specifications - Audio

#### HP Thin USB Powered Speakers

<b>On/Off/Volume Controls</b>	Right side of right speaker
<b>Power LED</b>	Front of right speaker (green)
<b>Frequency Response</b>	F0 to 20kHz
<b>Watts</b>	2/3 watt (normal/maximum)
<b>Dimensions/Speaker</b> (H x W x D)	5.72 x 3.74 x 0.96 in 14.52 x 9.50 x 2.45 cm
<b>Net Weight</b>	0.68 lbs 0.31 kg
<b>Color</b>	Black
<b>Environmental</b> (all conditions non-condensing)	Operating Temperature: 14° to 104° F -10° to 40° C Relative Humidity 40% to 90%
<b>Speaker Cable Length</b>	Input Cord: 5.91 ft 1800mm L-channel Cord: 3.28 ft 1000mm USB Cord: 5.91 ft 1800mm

### Technical Specifications - Communications

#### Intel 82578 GbE Network Connection (integrated)

<b>Connector</b>	RJ-45
<b>Controller</b>	Intel 82578 Gigabit platform LAN Connect Networking Controller
<b>Memory</b>	24 KB FIFO packet buffer memory
<b>Data rates supported</b>	10/100/1000 Mbps
<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3 ab and 802.3u compliant
<b>Bus architecture</b>	GLCI, LCI interface. Intel specific MAC to PHY interface
<b>Data transfer mode</b>	PCIe-like interface for 1000 speed, SMBus interface for lower 10/100 speeds.
<b>Data rates supported</b>	10/100/1000 Mbps
<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3 ab and 802.3u compliant
<b>Data transfer mode</b>	At gigabit GLCI (Intel proprietary 802.3 series-based interface) is for Data, LCI (parallel bus) for MDIO, at 10/100 LCI for both data and MDIO, GLCI is idle.
<b>Hardware certifications</b>	FCC B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
<b>Power requirement</b>	Requires 3.3V & 1.2V. Power consumption 761 Milliwatts
<b>ACBS</b>	Intel Auto Connect Battery Saving feature
<b>Boot ROM support</b>	Yes
<b>Network transfer mode</b>	Full-duplex Half-duplex (not supported for the 1000BASE-T transceiver) 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps
<b>Network transfer rate</b>	100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
<b>Operating temperature</b>	0° to 85° C
<b>Management</b>	WOL, auto MDI crossover, PXE, Muli-port teaming, RSS, Advanced cable diagnostic.
<b>Alerting</b>	ASF 2.0 support, AMT 3.0 support

### Technical Specifications - Communications

#### Broadcom NetXtreme GbE Ethernet Plus Network Interface Controller

<b>Connector</b>	RJ-45
<b>Controller</b>	Broadcom 5761 PCI-Express LAN Controller
<b>Memory</b>	8 MB NVRAM serial Flash
<b>Data rates supported</b>	10/100/1000 Mbps
<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, and 802.3x
<b>Bus architecture</b>	PCI-Express
<b>Data path width</b>	Single Channel PCI-Express
<b>Data transfer mode</b>	Bus Master DMA
<b>Hardware certifications</b>	FCC class B, Canada and US NRTL Mark, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia, UL listed (E212044), European Union Notice (CE 0682)
<b>Power requirement</b>	1.8W @ 3.3V
<b>Boot ROM support</b>	Yes
<b>Network transfer mode</b>	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)
<b>Network transfer rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
<b>Environmental</b>	Operating temperature 32° to 131°F (0° to 55° C) Operating humidity 131° F (55° C) with 5% to 95% non-condensing humidity
<b>Dimensions</b>	2.75 in x 4.13 in (7 cm x 10.5 cm), low profile compatible
<b>Operating system driver support</b>	Windows Vista 32-bit SP1, Windows Vista x64 SP1, Windows XP 32 bit professional
<b>Management capabilities</b>	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility, ASF2.0, DASH 1.0 and DASH 1.1 profiles

### Technical Specifications - Communications

#### Intel GbE CT Desktop Network Interface Connection

<b>Connector</b>	RJ-45
<b>Controller</b>	Intel 82574L Gigabit Ethernet Controller
<b>Memory</b>	Integrated Dual 48K configurable transmit receive FIFO Buffers
<b>Data rates supported</b>	10/100/1000 Mbps
<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
<b>Bus architecture</b>	PCI-E 1.0a
<b>Data path width</b>	X1, 250 MB/s, Bi-directional interface
<b>Data transfer mode</b>	Bus-master DMA
<b>Hardware certifications</b>	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
<b>Power requirement</b>	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
<b>Boot ROM support</b>	Yes
	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
<b>Network transfer rate</b>	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
<b>Environmental</b>	Operating temperature 32° to 131°F (0° to 55° C)
	Operating humidity 85% at 131° F (55° C)
<b>Dimensions</b>	4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm)
<b>Management</b>	WOL, PXE, DMI, WFM 2.0

#### HP Wireless Network Connection 802.11 b/g/n

<b>Dimensions (L x H)</b>	3.3 x 4.7 in 8.5 x 12 cm	
<b>Weight</b>	0.08 lbs 40 g	
<b>Controller</b>	Ralink RT2790	
<b>System interface</b>	PCIExpress x1	
<b>Network standard</b>	802.11 b/g/n	
<b>Frequency band</b>	2.400 - 2.497 GHz	
<b>Operating temperature</b>	14° to 149°F, operating (-10° to 65°C, operating)	
<b>Storage temperature</b>	-40° to 176°F, non-operating (-40° to 80°C, non-operating)	
<b>Humidity</b>	10-90% operating 5-95% non-operating	
<b>Operating voltage</b>	3.3V +/- 9% 12V +/- 8%	
	Platform/WLAN Mode	Power Consumption
	Maximum Power Consumption	10 Watts
	Transmit Only	4 Watts maximum averaged power over 1 second

### Technical Specifications - Communications

<b>Power consumption</b>	Transmit Packet or Active Scanning	1000 mA peak current for 100 microseconds or longer
	Receive Only Mode or Idle without IEEE PSP mode enabled	3 Watts maximum averaged over 1 second
	Idle, with IEEE PSP mode enabled	1.0 Watts maximum averaged over 1 second
	Transmit Disabled (turned off in software)	50 mW maximum, averaged over 1 second
	Platform in S3 or S4 (power removed from Low Profile PCI Express Card)	5 mW maximum, averaged over 1 second
<b>Output power</b> (approximately)	802.11b mode	+19 dBm +/- 1.0 dB maximum
	802.11g mode	+17 dBm +/- 1.0 dB maximum
	EWC mode	+17 dBm +/- 1.0 dB maximum (total power in all transmit chains)

	<b>Mode</b>	<b>Data rate</b>	<b>Sensitivity</b>
<b>Receive sensitivity</b>	802.11b	1 Mbps	-94 dBm
	802.11b	11 Mbps	-85 dBm
	802.11g	6 Mbps	-91 dBm
	802.11g	18 Mbps	-85 dBm
	802.11g	48 Mbps	-75 dBm
	802.11g	54 Mbps	-72 dBm
	EWC (2.4 GHz)	6.5 Mbps	-87 dBm
	EWC (2.4 GHz)	54 Mbps	-82 dBm
	EWC (2.4 GHz)	81 Mbps	-78 dBm
	EWC (2.4 GHz)	162 Mbps	-74 dBm
	EWC (2.4 GHz)	270 Mbps	-68 dBm
	EWC (2.4 GHz)	300 Mbps	-64 dBm

	<b>Data Rate (MCS)</b>	<b>Minimum Throughput</b>
<b>Data transfer rate</b>	1 Mbps (802.11 b)	700 kbps
	2 Mbps (802.11 b)	1.4 Mbps
	5.5 Mbps (802.11 b)	3.5 Mbps
	11 Mbps (802.11 b)	5.9 Mbps
	12 Mbps (802.11 g)	6 Mbps
	18 Mbps (802.11 g)	9 Mbps
	24 Mbps (802.11 g)	12 Mbps
	36 Mbps (802.11 g)	18 Mbps
	48 Mbps (802.11 g)	21 Mbps
	54 Mbps (802.11 g)	22.5 Mbps
	6.5 Mbps (20 MHz EWC)	4.5 Mbps
	13 Mbps (20 MHz EWC)	9 Mbps
	19.5 Mbps (20 MHz EWC)	13.5 Mbps
	26 Mbps (20 MHz EWC)	18 Mbps
	39 Mbps (20 MHz EWC)	27 Mbps

### Technical Specifications - Communications

	52 Mbps (20 MHz EWC)	36 Mbps
	58.5 Mbps (20 MHz EWC)	40 Mbps
	65 Mbps (20 MHz EWC)	45 Mbps
	78 Mbps (20 MHz EWC)	54 Mbps
	104 Mbps (20 MHz EWC)	72 Mbps
	117 Mbps (20 MHz EWC)	81 Mbps
	130 Mbps (20 MHz EWC)	91 Mbps
	13.5 Mbps (40 MHz EWC)	8 Mbps
	27 Mbps (40 MHz EWC)	16 Mbps
	40.5 Mbps (40 MHz EWC)	24 Mbps
	54 Mbps (40 MHz EWC)	32 Mbps
	81 Mbps (40 MHz EWC)	48 Mbps
	108 Mbps (40 MHz EWC)	64 Mbps
	121.5 Mbps (40 MHz EWC)	72 Mbps
	135 Mbps (40 MHz EWC)	81 Mbps
	IEEE and WiFi compliant 64 / 128 bit WEP encryption	
	AES: CCM	
	802.1x authentication	
<b>Security</b>	WPA: 802.1x, WPA-PSK and TKIP	
	WPA2 certification	
	IEEE 802.11i	
	Cisco Certified Extensions, all versions through V5	
<b>Antenna</b>	HP part number 497792-001	
<b>Certifications</b>	Wi-Fi certified	
<b>Certifications for use by country</b>	United States, Canada, Peru, Taiwan	

---

### Intel WiFi Link 5100 a/b/g/n Wireless Network Interface Connection (USDT)

	IEEE 802.11a
	IEEE 802.11b
	IEEE 802.11g
	IEEE 802.11n
<b>Wireless LAN Standards</b>	<b>Note:</b> The specifications for 802.11n draft 2.0 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11n WLAN devices. In countries where n draft 2.0 is not allowed, this capability is not enabled.
	Wi-Fi certified (802.11a/b/g only)
<b>Interoperability</b>	Cisco Compatible Extensions Program compliant (802.11a/b/g only) with Microsoft Windows Vista and XP
	Tested with wireless access points from several major manufacturers



### Technical Specifications - Communications

<b>Frequency Band</b>	2.4 GHz and 5 GHz	
<b>Antenna Structure</b>	1 transmit; 2 receive (1x2)	
	802.11b: 1, 2, 5.5, 11 Mbps	
	802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps	
<b>Data Rates</b>	802.11n (draft): 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n (draft) specification	
<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM	
<b>Security</b>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128, 192, and 256 bits), 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST	
	Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.	
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.	
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK	
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points	
<b>Output Power (for CCK)</b>	15 dBm	
<b>Output Power (for OFDM; power varies by data rate)</b>	15 dBm	
	Transmit: 2.3 Watts (average, with one spatial streams)	
	Receive: 1.9 Watts (average with two receive chains)	
<b>Power Consumption</b>	Idle mode: 30 mW (average) Radio off: 20 mW (max)	
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode	
<b>Receiver Sensitivity<sup>4</sup></b>	300 Mbps: -68 dBm, 54 Mbps: -74 dBm, 6 Mbps: -90 dBm	
<b>Antenna Connections</b>	3 U.FL type connectors, 50 ohm nominal impedance	
	802.11 a - Typical (@6 Mbps)	600 feet - Outdoor Open Area 150 feet - Indoor, Office environment
<b>Range</b>	802.11 b - Typical (@1 Mbps)	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
	802.11 g - Typical (@1 Mbps)	1200 feet - Outdoor Open Area 300 feet - Indoor, Office environment
<b>Form Factor</b>	PCI-Express MiniCard	
<b>Weight</b>	0.013 lb (6 g)	
<b>Dimensions</b>	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
<b>Operating Voltage</b>	3.3V +/- 9%, 1.5V +/- 5%	
<b>Temperature</b>	Operating: 32° to 176° F (0° to 80° C) Non-operating: -40° to 176° F (-40° to 80° C)	

### Technical Specifications - Communications

**Humidity** Operating: 10% to 90% (non-condensing)  
Non-operating: 5% to 90% (non-condensing)

**Altitude** Operating: 0 to 10,000 ft (3,048 m)  
Non-operating: 0 to 50,000 ft (15,240 m)

**Configuration Utility<sup>5</sup>**

Microsoft Windows XP	Microsoft Windows Vista
<ul style="list-style-type: none"><li>• Microsoft Windows XP Wireless Network Connection Manager</li><li>• Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support)</li></ul>	<ul style="list-style-type: none"><li>• Microsoft Windows Vista Wireless Network Connection Manager.</li><li>• Intel IHV extensions for Windows Vista available to support Cisco Compatible Extensions.</li></ul>

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

---

### LSI 56K International SoftModem PCI Express x1 Card

**Data Transmission** Technology speeds: 56,000 Kbps maximum downstream data, controllerless

**Note:**  
56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.

**Data Speeds** (Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300

**Data Standards** ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103

**Fax Speeds** 14,400/12,000/9,600/7,200/4,800/2,400/1,200/300 b/

**Fax Mode Capabilities** ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2

**Error Correction and Data Compression** V.44, 42bis, V.42 and MNP2-5

**Power Management** PCI Bus Power Management Interface Specification (PCI-PM) Revision 1.2, Appendix A. D0, D3hot, and D3cold. Wake on Ring state when in D3cold. If the power management event (PME) feature is enabled in D3cold, a modem can wake the system via WAKE# (WAKEN) or beacon. Meets PCI Express 1.1 standard.

**Upgradeability** Driver upgradeable for future enhancements

**Video** ITU-T V.80 video ready interface  
TIA/EIA 602 standard AT command set

**Other** Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface  
Optional ring wakeup signal

**Operating Temperature** 32° to 158° F (0° to 70° C)

**Operating Humidity** 20% to 90%, non-condensing

### Technical Specifications - Communications

<b>Power</b>	Requires a 3.3-V auxiliary power rail on PCI express bus Uses only one PCI express load (i.e., one grant/request pair), one shared IRQ, one electrical load
<b>Chipset</b>	LSI SV92EX - Integrated PCI interface with 3.3-V tolerant buffers and CardBus support
<b>Dimensions (L X H)</b>	Complies with PCI express low profile specifications-6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
<b>Connection</b>	Single RJ-11 connector
<b>Other Features</b>	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
<b>Safety</b>	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark)
<b>EMC</b>	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
<b>Telecom</b>	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
<b>Other</b>	The SV92EX device is packaged in a 32-pin micro leadless chip carrier (MLCC). The SV92EX is fully compliant with the PCI Express revision 1.1 specification. WHQL approved; ASPM compliant.

### Technical Specifications - Graphics

#### Intel Graphics Media Accelerator (GMA) 4500

**3D/2D Controller** Microsoft DirectX® 10 based with support for Pixel Shader 3.0

**VGA Controller** Integrated

**DisplayPort** Integrated, Multimode capable; supports HDCP

**Bus Type** PCI Express™ x16

**RAMDAC** Integrated, 350 MHz

#### Memory

Graphics memory is shared with system memory. Graphics memory usage varies depending on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content. For Vista, use of PAVP heavy mode preallocates an additional 96MB.

Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.

	Total System Memory	Pre-Allocated (MB)	DVMT (MB)
<b>Windows XP Memory Usage</b>	.5GB	32	128
	1.0GB	32	512
	1.5GB	32	768
	2.0GB & more	32	1024

Assumes Management Engine, VT-d enabled and other memory allocated for other BIOS usage

	System Memory	PVAP	Avail System Memory (MB)	Total Avail GFX Memory (MB)	Dedicated Video Memory (MB)	System Video Memory (MB)	Shared System Memory (MB)
<b>Windows Vista Memory Usage</b>	1 GB	Lite	952	252	32	96	124
		Heavy	856	294	122	6	166
	2 GB	Lite	1976	764	32	96	636
		Heavy	1880	806	122	6	678
	4 GB	Lite	4024	1759	32	96	1631
		Heavy	3928	1759	122	6	1631
	6 GB	Lite	6072	1759	32	96	1631
		Heavy	5976	1759	122	6	1631
8 GB	Lite	8120	1759	32	96	1631	
	Heavy	8024	1759	122	6	1631	

**HW Video Decode** Hardware Accelerated decode for MPEG2 encrypted video; support for PAVP Lite (default) and Heavy ( or Paranoid) modes

**Maximum Color Depth** 32 bits/pixel

**Maximum Vertical Refresh Rate** 85 Hz at up to 1920x1440, 75 Hz at 2048x1536. Varies with mode and configuration. See table below.

**Multi-display Support** Integrated dual independent monitor support facilitated via one VGA port and one DisplayPort integrated on the back plane of the system board and presented as part of the rear I/O set of interfaces. DVI supported via optional HP DisplayPort to DVI-D adapter.

### Technical Specifications - Graphics

**Graphics/Video API Support** Microsoft DirectX® 10, OpenGL® 1.5 (OpenGL® 2.0 available in a driver update)

Resolutions Supported	Resolution	Maximum Refresh Rate (Hz)	
		Analog Connection	Digital Connection
	640x480	85	60
	800x600	85	60
	1024x768	85	60
	1280x720	85	60
	1280x1024	85	60
	1440x900	75	60
	1600x1200	85	60
	1680x1050	75	60
	1920x1080	85	60-R
	1920x1200	85	60-R
	1920x1440	85	N/A
	2048x1536	75	N/A
	2560x1600	N/A	60*

\* Only supported when using a DisplayPort connection

Note:

Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Note:

60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

### NVIDIA Quadro NVS 290 Graphics Card

<b>Bus Type</b>	PCI Express x16; low profile	PCI Express x1, low profile
<b>Memory</b>	256 MB 400MHz DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage	
<b>Connector</b>	Single high-density DMS-59 Flex Connector	
<b>Dimensions</b>	Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm)	
<b>Multi-Monitor support</b>	Dual monitor support	
<b>RAMDAC</b>	Integrated dual 400MHz	
<b>Maximum Pixel Clock</b>	350-MHz	
<b>Overlay planes</b>	One 16-bit video overlay plane	One 1-bit video overlay plan
<b>High Definition Video Processor (HDVP)</b>	Full screen, full frame video playback of HDTV and DVD content	
	DVD ready motion compensation for MPEG-2	
	Independent hardware color controls for video overlay	
	Hardware color space conversion (YUV 4:2:2 and 4:2:0)	
	IDCT motion compensation	
	5-tap horizontal by 3-tap vertical filtering	
	8:1 up/down scaling	

**Specification**

**Description**

### Technical Specifications - Graphics

<b>Board Configuration</b>	Description	G86-825
	Core Clock	460-MHz
	Memory Clock	400-MHz
	Frame Buffer	256-MB DDR2, 64-bit wide
<b>Display resolution support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link).	
<b>Color planes</b>	NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows	
<b>DVI support</b>	32-bit color buffer	
<b>Supported graphics APIs</b>	DMS-59 (to dual DVI-SL)	
	OGL 2.1 & DX10 Support; Shader Model 4.0	

	Resolution	Maximum Refresh Rate	
		Analog Connection	Digital Connection
<b>Resolutions Supported</b>	640x480	85	60
	800x600	85	60
	1024x768	85	60
	1280x720	85	60
	1280x1024	85	60
	1440x900	75	60
	1600x1200	85	60
	1680x1050	75	60
	1920x1080	85	60-R
	1920x1200	85	60-R
	1920x1440	85	N/A
	2048x1536	75	N/A
2560x1600	N/A	N/A	

**Note:**

Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

**Note:**

60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

### Technical Specifications - Graphics

#### NVIDIA Quadro NVS 295 Graphics Card

<b>Form Factor</b>	2.731 inches (H) × 6.600 inches (L), Half-Height
<b>Graphics Controller</b>	NVIDIA Quadro NVS 295 Graphics Board
<b>Bus Type</b>	PCI Express x16, Generation 2.0
<b>Memory</b>	256 MB GDDR3 SDRAM unified graphics memory 2 DisplayPort
<b>Connectors</b>	Comes with 2 DisplayPort to VGA Adapters <b>Note:</b> When purchased as an after-market option, this comes instead with 2 DisplayPort to DVI-D adapters.
<b>Maximum Resolution</b>	Two DisplayPort outputs drive two digital displays up to 2560 × 1600 Drives DisplayPort enabled digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking
<b>Display Output</b>	Drives DVI enabled digital displays at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single link) cable)
<b>Supported Graphics APIs</b>	OpenGL 3.0 DirectX 10.0

#### NVIDIA NVS 300 Graphics Card

<b>Form Factor</b>	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to CMT or MT
<b>Graphics Controller</b>	Nvidia GT218 GPU
<b>Memory Frame Buffer</b>	512MB DDR3, 64-bit wide
<b>Output Connectors</b>	Single DMS-59 connector Supports dual analog displays with included DMS-59 to dual VGA Y cable. Supports dual DVI displays with an optional DMS59 to dual DVI cable.
<b>Core Clock</b>	520MHz
<b>Memory Clock</b>	790MHz
<b>Supported Graphics APIs</b>	OpenGL 3.3 support in hardware DirectX 10.0 support in hardware

#### Display Resolutions and Refresh Rates

**NOTE:** other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60

### Technical Specifications - Graphics

1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A

**NOTE:** 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

### NVIDIA GeForce 310 Graphics Card

**Bus type** PCI Express (x16 lanes)

**Board display options** Supports two displays via the DisplayPort and DVI connectors

	Specification	Description
<b>Board configuration</b>	Graphics Chip	RV620
	Core clock	750 MHz
	Memory clock	500 MHz
	Frame buffer	512 MB DDR3, 64 bit wide

**Audio Support** (through HDMI only) Integrated HD Audio codec supports linear PCM and Dolby® Digital (7.1) audio formats for HDMI output

**Core power** 22 W (max)

**Dimensions** (H x D) 2.71 in x 6.60 in  
68.90 mm x 167.65 mm

**Weight** 0.30 lb (134.3 g)

**Maximum vertical refresh rate** 85 Hz

**Display support** Integrated 400 MHz RAMDAC

**Display max resolution** 2560 x 1600 digital, 2048 x 1536 analog



### Technical Specifications - Graphics

	Resolution	Maximum Refresh Rate (Hz)	
		Analog Connection	Digital Connection
<b>Supported Resolutions</b>	640x480	85	60
	800x600	85	60
	1024x768	85	60
	1280x720	85	60
	1280x1024	85	60
	1440x900	75	60
	1600x1200	85	60
	1680x1050	75	60
	1920x1080	85	60-R
	1920x1200	85	60-R
	1920x1440	85	N/A
2048x1536	75	N/A	
2560x1600	N/A	60*	

\* Only supported when using a dual-link DVI or DP connection.

Note:

Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Note:

60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

#### Option Kit Contents

NVIDIA GeForce 310 DP PCIe x16 Graphics Card with full height bracket attached  
 DVI to VGA Adapter  
 Software CD with graphics drivers  
 Low profile bracket to convert the card for use in a low profile chassis  
 Warranty documentation

#### Compliance Standards

##### EMC Emissions

FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use  
 CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment  
 Canadian Standard ICES-003 is equivalent to CISPR22  
 Taiwanese Standard BSMI  
 Japanese VCCI  
 Australian C-Tick  
 Korean (MIC)

##### EMC Immunity

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Measurement

### Technical Specifications - Graphics

#### ATI Radeon HD 4550 Graphics Card

**Bus type** PCI Express x16

**Maximum vertical refresh rate** 85 Hz

**Display support** Integrated 400 MHz RAMDAC

**Display max resolution** 1900 x 1200 digital, 2048 x 1536 analog

**Board display options** Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output

	<b>Specification</b>	<b>Description</b>
<b>Board configuration</b>	Graphics Chip	RV710
	Core clock	600 MHz
	Memory clock	800 MHz
	Frame buffer	512 MB DDR3, 64 bit wide
<b>Languages supported</b>	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish	

	<b>EMC Emissions</b>	<b>EMC Immunity</b>
<b>Compliance standards</b>	FCC Part 15, Subpart B – Unintentional Radiators, Class B Computing Devices for Home & Office Use	CISPR 24:1997/EN 55024:1998 – Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement
	CISPR22: 1997/EN 55022:1998 – Class B – Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment	
	Canadian Standard ICES-003 is equivalent to CISPR22	
	Taiwanese Standard BSMI	
	Japanese VCCI	
Australian C-Tick		
Korean (MIC)		

### Technical Specifications - Graphics

Resolutions Supported	Resolution	Maximum Refresh Rate (Hz)	
		Analog Connection	Digital Connection
	640x480	85	60
	800x600	85	60
	1024x768	85	60
	1280x720	85	60
	1280x1024	85	60
	1440x900	75	60
	1600x1200	85	60
	1680x1050	75	60
	1920x1080	85	60-R
	1920x1200	85	60-R
	1920x1440	85	N/A
	2048x1536	75	N/A
	2560x1600	N/A	N/A

**Note:**

Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

**Note:**

60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

---

#### ATI Radeon HD 4650 Graphics Card

<b>Bus type</b>	PCI Express x16
<b>Maximum vertical refresh rate</b>	85 Hz
<b>Display support</b>	Integrated 400 MHz RAMDAC
<b>Display max resolution</b>	2560 x 1600 digital, 2048 x 1536 analog

### Technical Specifications - Graphics

Resolutions Supported	Resolution	Maximum Refresh Rate (Hz)	
		Analog Connection	Digital Connection
	640x480	85	60
	800x600	85	60
	1024x768	85	60
	1280x720	85	60
	1280x1024	85	60
	1440x900	75	60
	1600x1200	85	60
	1680x1050	75	60
	1920x1080	85	60-R
	1920x1200	85	60-R
	1920x1440	85	N/A
	2048x1536	75	N/A
	2560x1600	N/A	60*

\* Only supported when using a dual-link DVI or DP connection

**Note:**

Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

**Note:**

60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

**Board display options** Supports two displays via included two DisplayPort and one Dual Link DVI-I connectors.

**Specification**

**Description**

Graphics Chip RV635

**Board configuration**

Core clock 725 MHz

Memory clock 500 MHz

Frame buffer 1 GB DDR3, 128 bit wide

**Core power** 56 W

### Technical Specifications - Graphics

**Board display options** Supports two displays via included two DisplayPort and one Dual Link DVI-I connectors.

#### EMC Emissions

#### EMC Immunity

FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use  
 CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment  
 Canadian Standard ICES-003 is equivalent to CISPR22  
 Taiwanese Standard BSMI  
 Japanese VCCI  
 Australian C-Tick  
 Korean (MIC)

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement

#### Board configuration

### HP ADD2 SDVO DVI-D Out PCI Express x1 Adapter Card

**Form Factor** Low-profile card

**DVI-D Connector** Digital connection only

**Dual Head Support** Yes, when used with the integrated VGA connector

**Display Devices Supported** HP L1740  
 HP L1940T  
 HP L2045W  
 HP LP1965  
**Note:**  
[These graphics adapters offer optimal performance with any display that meets applicable VESA standards](#)

**Color Depth** All modes support 8-bpp, 16-bpp, and 24-bpp color depths

**Host Interface Connector** Mechanically compliant with PCI-E standard  
 Complies with the Intel ADD2 and Intel Serial Digital Video Output (SDVO) specifications

**Dot Clock** 165 MHz maximum

**Display Modes** Supports display modes that require up to 165-MHz bandwidth on the link, as shown in the following table.

Resolution		60-Hz LCD	60-Hz	75-Hz	85-Hz
Blanking		5% reduced	GTF	GTF	GTF
640 x 480	VGA	Yes	Yes	Yes	Yes
800 x 600	SVGA	Yes	Yes	Yes	Yes
1024 x 768	XGA	Yes	Yes	Yes	Yes
1280 x 1024	SXGA	Yes	Yes	No	No
1600 x 1200	UXGA	Yes	Yes	No	No

#### Resolutions Supported

### Technical Specifications - Graphics

#### HP DisplayPort to DVI-D Adapter

<b>Connectors</b>	DisplayPort and DVI-D single link connector
<b>Adapter length</b>	7.5 in (19.0 cm)
<b>Adapter weight</b>	.10 lbs (.05 kg)

#### HP DisplayPort to VGA Adapter

**Connectors** DisplayPort and VGA connector

**Adapter length** 8 in (20 cm)

**Adapter weight**

.1 lbs (.06 kg)

**Maximum vertical refresh rate**

85 Hz

**Display support**

162 MHz RAMDAC

**Display max resolution**

1600x1200

**Resolutions Supported**

**Resolution**

**Max refresh rate**

640x480

85

800x600

85

1024x768

85

1280x720

85

1280x1024

85

1440x900

75

1600x1200

60

1680x1050

60

1920x1080

60-R

1920x1200

60-R

**Note:**

Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP. Using the DisplayPort to VGA Adapter may require an update to the graphics driver installed on your system. To install the most up-to-date graphics driver go to: [www.hp.com](http://www.hp.com).

**Note:**

60-R denotes reduced blanking timings are used. Not all monitors support reduced blanking timing.

### Technical Specifications - Hard Drives

#### 250-GB 2.5" Hard Disk Drive

<b>Capacity</b>	250,059,350,016 bytes
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	Serial ATA (SATA)
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 GB/s
<b>Buffer Size</b>	8 MB
<b>Logical Blocks</b>	488,397,168
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 2.0 ms <b>Average:</b> 12 ms <b>Full-Stroke:</b> 22 ms
<b>Height</b> (nominal)	0.374 in/9.5 mm
<b>Width</b> (nominal)	Media diameter: 2.5 in/63.5 mm Physical size: 2.75 in/70 mm
<b>Operating Temperature</b>	41° to 131° F 5° to 55° C

#### 250-GB 3.5" Hard Disk Drive

<b>Capacity</b>	250,059,350,016 bytes
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	Serial ATA (SATA)
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 GB/s (limited by the system SATA controller)
<b>Buffer Size</b>	8 MB
<b>Logical Blocks</b>	488,397,168
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 1.0 ms <b>Average:</b> 8.5 ms <b>Full-Stroke:</b> 18 ms
<b>Height</b> (nominal)	1 in/2.54 cm
<b>Width</b> (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

### Technical Specifications - Hard Drives

#### 500-GB 3.5" Hard Disk Drive

<b>Capacity</b>	500,107,862,016 bytes
<b>Rotational Speed</b>	7,200 rpm
<b>Interface</b>	Serial ATA (SATA)
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 3 GB/s (limited by the system SATA controller)
<b>Buffer Size</b>	16 MB
<b>Logical Blocks</b>	976,773,168
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track:</b> 2.0 ms <b>Average:</b> 11 ms <b>Full-Stroke:</b> 21 ms
<b>Height</b> (nominal)	1 in/2.54 cm
<b>Width</b> (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

#### 64-GB 2.5" Solid State Drive

<b>Capacity</b>	64 GB
<b>Interface</b>	Serial ATA (SATA)
<b>Architecture</b>	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
<b>Internal transfer rate</b>	<b>Write speed</b> Up to 220 MB/s <b>Read speed</b> Up to 120 MB/s
<b>Host transfer rate</b>	<b>Ultra DMA mode</b> Up to 150 MB/s
<b>Power</b>	<b>DC power requirement</b> 5 VDC 5%-100 mV ripple p-p <b>Total power consumption</b> <1.12Watt
<b>Dimensions</b> (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
<b>Weight</b>	0.14 lb/65 g <b>Operating Temperature:</b> 32° to 158° F (0° to 70° C)
<b>Environmental</b> (all conditions, non-condensing)	<b>Relative Humidity:</b> 5% to 95% <b>Maximum Wet Bulb Temperature</b> (operating) 84° F (29° C)

#### Note:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.



### Technical Specifications - Hard Drives

#### 80-GB 2.5" Solid State Drive

<b>Capacity</b>	80-GB
<b>Interface</b>	Serial ATA (SATA)
<b>Architecture</b>	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
<b>Dimensions (W x H x D)</b>	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
<b>Weight</b>	0.18 lb/80 g
<b>Bandwidth Performance</b>	<b>Sustained Sequential Read:</b> Up to 250 MB/s
	<b>Sustained Sequential Write:</b> Up to 70 MB/s
	<b>Random Read:</b> Up to 35K IOPs
	<b>Random Write:</b> Up to 6.6K IOPs
<b>Latency</b>	<b>Read:</b> 65-ms
	<b>Write:</b> 85-ms
<b>Power</b>	<b>DC power requirement</b> 5 VDC 5%-100 mV ripple p-p
	<b>Total power consumption</b> 0.15W (active); 0.075W (idle)
<b>Useful Drive Life</b>	35TB written, up to 20GB/day for 5 years
	<b>Operating Temperature:</b> 32° to 158° F (0° to 70° C)
	<b>Relative Humidity:</b> 5% to 95%
<b>Environmental</b> (all conditions, non-condensing)	<b>Maximum Wet Bulb</b>
	<b>Temperature (operating)</b> 84° F (29° C)
	<b>Shock:</b> 1,500 G/0.5-ms

#### Note:

For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

### Technical Specifications - Input Devices

#### HP USB Standard Keyboard

<b>Physical characteristics</b>	<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
	<b>Dimensions (L x W x H)</b>	18.0 x 6.4 x 0.98 in 45.8 x 16.3 x 2.5 cm
	<b>Weight</b>	2 lb 0.9 kg
<b>Electrical</b>	<b>Operating voltage</b>	+ 5VDC ± 5%
	<b>Power consumption</b>	50-mA maximum (with three LEDs ON)
	<b>System interface</b>	USB Type A plug connector
	<b>ESD</b>	CE level 4, 15-kV air discharge
	<b>EMI – RFI</b>	Conforms to FCC rules for a Class B computing device
	<b>Microsoft® PC 99 – 2001</b>	Functionally compliant
	<b>Languages</b>	38 available
	<b>Keycaps</b>	Low-profile design
	<b>Switch actuation</b>	55-g nominal peak force with tactile feedback
	<b>Switch life</b>	20 million keystrokes (using Hasco modified tester)
<b>Mechanical</b>	<b>Switch type</b>	Contamination-resistant switch membrane
	<b>Key-leveling mechanisms</b>	For all double-wide and greater-length keys
	<b>Cable length</b>	6 ft (1.8 m)
	<b>Microsoft PC 99 –2001</b>	Mechanically compliant
	<b>Acoustics</b>	43-dBA maximum sound pressure level
	<b>Operating temperature</b>	50° to 122° F (10° to 50° C)
	<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
	<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)
	<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)
	<b>Environmental</b>	<b>Operating shock</b>
<b>Non-operating shock</b>		80 g, six surfaces
<b>Operating vibration</b>		2-g peak acceleration
<b>Non-operating vibration</b>		4-g peak acceleration
<b>Drop (out of box)</b>		26 in (66 cm) on carpet, six-drop sequence

### Technical Specifications - Input Devices

	<b>Drop</b> (in box)	42 in (107 cm) on concrete, 16-drop sequence
<b>Approvals</b>	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, and TUVGS	
<b>Kit contents</b>	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

### HP PS/2 Standard Keyboard

<b>Physical characteristics</b>	<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
	<b>Dimensions</b> (L x W x H)	18.0 x 6.4 x 0.98 in 45.8 x 16.3 x 2.5 cm
	<b>Weight</b>	2 lb 0.9 kg minimum
<b>Electrical</b>	<b>Operating voltage</b>	+ 5VDC $\pm$ 5%
	<b>Power consumption</b>	50-mA maximum (with three LEDs ON)
	<b>System interface</b>	PS/2 6-pin mini din connector
	<b>ESD</b>	CE level 4, 15-kV air discharge
	<b>EMI – RFI</b>	Conforms to FCC rules for a Class B computing device
	<b>Microsoft® PC 99 – 2001</b>	Functionally compliant
	<b>Languages</b>	38 available
	<b>Keycaps</b>	Low-profile design
	<b>Switch actuation</b>	55-g nominal peak force with tactile feedback
	<b>Switch life</b>	20 million keystrokes (using Hasco modified tester)
<b>Mechanical</b>	<b>Switch type</b>	Contamination-resistant switch membrane
	<b>Key-leveling mechanisms</b>	For all double-wide and greater-length keys
	<b>Cable length</b>	6 ft 1.8 m
	<b>Microsoft PC 99 –2001</b>	Mechanically compliant
	<b>Acoustics</b>	43-dBA maximum sound pressure level
	<b>Operating temperature</b>	50° to 122° F (10° to 50° C)
	<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)
<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)	

### Technical Specifications - Input Devices

<b>Environmental</b>	<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)
	<b>Operating shock</b>	40 g, six surfaces
	<b>Non-operating shock</b>	80 g, six surfaces
	<b>Operating vibration</b>	2-g peak acceleration
	<b>Non-operating vibration</b>	4-g peak acceleration
	<b>Drop (out of box)</b>	26 in (66 cm) on carpet, six-drop sequence
	<b>Drop (in box)</b>	42 in (107 cm) on concrete, 16-drop sequence
<b>Approvals</b>	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
<b>Ergonomic compliance</b>	ANSI HFS 100, ISO 9241-4, and TUVGS	
<b>Kit contents</b>	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

### HP USB SmartCard Keyboard

<b>Physical characteristics</b>	<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
	<b>Form factor</b>	USB basic Smart Card keyboard
	<b>Colors</b>	Carbonite/Silver
	<b>Dimensions (H x W x D)</b>	18.2 x 6.3 x 1.3 in
		46.3 x 16.1 x 3.3 cm
	<b>Weight</b>	2 lb (0.9 kg) minimum
	<b>Electrical</b>	<b>Operating voltage</b>
<b>Power consumption</b>		100-mA maximum (with four LEDs ON)
<b>System interface</b>		USB Type A plug connector
<b>ESD</b>		CE level 4, 15-kV air discharge
<b>EMI - RFI</b>		Conforms to FCC rules for a Class B computing device
<b>Microsoft PC 99 - 2001</b>		Functionally compliant
<b>Languages</b>		30+ available
<b>Keycaps</b>		Low-profile design
<b>Switch actuation</b>		55 g nominal peak force with tactile feedback
<b>Switch life</b>		20 million keystrokes (using Hasco modified tester)
<b>Mechanical</b>	<b>Switch type</b>	Contamination-resistant membrane
	<b>Key-leveling mechanisms</b>	For all double-wide and greater-length keys
	<b>Cable length</b>	6 ft (1.8 m)
	<b>Microsoft PC 99 - 2001</b>	Mechanically compliant
	<b>Acoustics</b>	43-dBA maximum sound pressure level
	<b>Operating temperature</b>	50° to 122° F (10° to 50° C)

### Technical Specifications - Input Devices

<b>Environmental</b>	<b>Non-operating temperature</b>	-22° to 140° F (-30° to 60° C)	
	<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)	
	<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)	
	<b>Operating shock</b>	40 g, six surfaces	
	<b>Non-operating shock</b>	80 g, six surfaces	
	<b>Operating vibration</b>	2-g peak acceleration	
	<b>Non-operating vibration</b>	4-g peak acceleration	
	<b>Drop (out of box)</b>	26 in (66 cm) on carpet, six-drop sequence	
	<b>Drop (in box)</b>	42 in (107 cm) on concrete, 16-drop sequence	
		<b>Support</b>	All ISO 7816 smart cards
	<b>Interface</b>	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)	
	<b>Chipset</b>	SCM STCII	
	<b>Standard APIs supported</b>	PC/SC, EMV2000, SET	
	<b>Power</b>	USB Port Short circuit detection (protects smart card and reader) Power supply compliant with ISO7816 and EMV (5V, 60 mA) Supports 3-V and 5-V cards	
	<b>Power consumption</b>	250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA maximum startup current using a high-current, 60-mA smart card)	
<b>SMARTCARD function</b>			
	<b>Communication</b>	<b>From card</b>	Programmable from 9,600 baud to 115,200 baud
		<b>From computer</b>	Up to 38,400 baud
	<b>Landing mechanism</b>	<b>Contact device</b>	Friction contact
		<b>Card insertions rating</b>	Up to 100,000 insertion cycles
	<b>Interface modes</b>	USB communications through USB port SCM protocol Automatic card insertion/removal detection	
	<b>Reader performance interface</b>	USB connection	
	<b>Electro-magnetic standards</b>	<b>Europe</b>	89/336/CEE guideline
		<b>USA</b>	USAFCC part 15

### HP USB & PS2 Washable Keyboard

<b>Physical Characteristics</b>	<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
	<b>Dimensions</b> (L x W x H)	18.0 x 6.4 x 0.98 in 45.8 x 16.3 x 2.5 cm
	<b>Weight</b>	2 lb (0.9 kg) minimum
<b>Electrical</b>	<b>Operating voltage</b>	+ 5VDC ±5%

### Technical Specifications - Input Devices

	<b>Power consumption</b>	50-mA maximum (with three LEDs ON)
	<b>System interface</b>	USB Type A plug connector
	<b>ESD</b>	CE level 4, 15-kV air discharge
	<b>EMI - RFI</b>	Conforms to FCC rules for a Class B computing device
	<b>Microsoft® PC 99 - 2001</b>	Functionally compliant
<b>Mechanical</b>	<b>Keycaps</b>	Stepped -profile design
	<b>Switch actuation</b>	55-g nominal peak force with tactile feedback
	<b>Switch life</b>	20 million keystrokes
	<b>Switch type</b>	Contamination-resistant switch membrane
	<b>Key-leveling mechanisms</b>	For all double-wide and greater-length keys
	<b>Cable length</b>	7 ft 2.2 m
	<b>Microsoft PC 99 - 2001</b>	Mechanically compliant
	<b>Acoustics</b>	43-dBA maximum sound pressure level
<b>Environmental</b>	<b>Operating temperature</b>	50° to 122° F 10° to 50° C
	<b>Non-operating temperature</b>	-4° to 149° F -20° to 65° C
	<b>Operating humidity</b>	10% to 95% (non-condensing at ambient)
	<b>Non-operating humidity</b>	0% to 95% (non-condensing at ambient)
	<b>Operating shock</b>	40 g, six surfaces
	<b>Non-operating shock</b>	80 g, six surfaces
	<b>Operating vibration</b>	2-g peak acceleration
	<b>Non-operating vibration</b>	4-g peak acceleration
	<b>Drop (out of box)</b>	26 in (66 cm) on carpet, six-drop sequence
	<b>Drop (in box)</b>	42 in (107 cm) on concrete, 16-drop sequence
<b>Approvals</b>		UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X
<b>Ergonomic compliance</b>		ANSI HFS 100, ISO 9241-4, and TUVGS

### HP Smart Card CCID Keyboard

<b>Keys</b>	104, 105, 106, 107, 109 layout (depending upon country)
-------------	--

### Technical Specifications - Input Devices

<b>Physical Characteristics</b>	<b>Form factor</b>	USB basic smart card keyboard	
	<b>Colors</b>	Carbonite/Silver	
	<b>Dimensions</b> (H x W x D)	18.2 x 6.3 x 1.3 in 46.3 x 16.1 x 3.3 cm	
	<b>Weight</b>	2 lb 0.9 kg minimum	
	<b>Operating voltage</b>	+ 5VDC ± 5%	
	<b>Power consumption</b>	100-mA maximum (with four LEDs ON)	
	<b>Electrical</b>	<b>System interface</b>	USB Type A plug connector
		<b>ESD</b>	CE level 4, 15-kV air discharge
		<b>EMI - RFI</b>	Conforms to FCC rules for a Class B computing device
		<b>Microsoft PC 99 - 2001</b>	Functionally compliant
<b>Languages</b>		30+ available	
<b>Keycaps</b>		Standard design	
<b>Switch actuation</b>		55 g nominal peak force with tactile feedback	
<b>Switch life</b>		20 million keystrokes (using Hasco modified tester)	
<b>Mechanical</b>		<b>Switch type</b>	Contamination-resistant membrane
		<b>Key-leveling mechanisms</b>	For all double-wide and greater-length keys
	<b>Cable length</b>	6 ft 1.8 m	
	<b>Microsoft PC 99 - 2001</b>	Mechanically compliant	
	<b>Acoustics</b>	43-dBA maximum sound pressure level	
	<b>Operating temperature</b>	50° to 122° F 10° to 50° C	
	<b>Non-operating temperature</b>	-22° to 140° F -30° to 60° C	
	<b>Operating humidity</b>	10% to 90% (non-condensing at ambient)	
	<b>Non-operating humidity</b>	20% to 80% (non-condensing at ambient)	
	<b>Environmental</b>	<b>Operating shock</b>	40 g, six surfaces
<b>Non-operating shock</b>		80 g, six surfaces	
<b>Operating vibration</b>		2-g peak acceleration	
<b>Non-operating vibration</b>		4-g peak acceleration	
<b>Drop</b> (out of box)		26 in (66 cm) on carpet, six-drop sequence	
<b>Drop</b> (in box)		42 in (107 cm) on concrete, 16-drop sequence	
<b>Support</b>		All ISO 7816 smart cards	
<b>Interface</b>		Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)	
<b>Chipset</b>		SCM STCIII	

### Technical Specifications - Input Devices

	<b>Standard APIs supported</b>	PC/SC, EMV2000, CT-API	
		USB Port	
	<b>Power</b>	Short circuit detection (protects smart card and reader)	
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)	
<b>SmartCard Function</b>		Supports 3-V and 5-V cards	
	<b>Power consumption</b>	100-mA maximum draw	
	<b>Communication</b>	From card	9600 bps to 330,000 bps
		From computer	12 Mbps (USB transfer speed)
	<b>Landing mechanism</b>	Contact device	Friction contact
		Card insertions rating	Up to 100,000 insertion cycles
	<b>Interface modes</b>	CCID protocol	
	<b>Reader performance interface</b>	USB connection	
	<b>Electro-magnetic standards</b>	Europe	2004/108/EC
		USA	USAFCC part 15
<b>Approvals</b>		CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF	
<b>Ergonomic Compliance</b>		ISO 9241-4, TUVGS	
	<b>HP</b>	HP ProtectTools Smart Card	
	<b>American Express</b>	Amex Blue	
		Cryptoflex 8K	
		Cryptoflex 16K	
		Cryptoflex 32K	
		Cryptoflex 32K e-gate	
		Cyberflex Access 64K	
		Cyberflex Access 32K	
		Cyberflex 32K e-gate	
		Cyberflex 64K	
	<b>Axalto (Schlumberger)</b>	Cyberflex Palmera	
		Payflex-S	
		Payflex 1K	
		Payflex 2K	
		Payflex 4K	
		Payflex 8K	
		Prismera	
		US DoD CAC	
		PrimeFlex Store 8K	
		PrimeFlex Store 2K	
	<b>Cardlogix</b>	CLXSU004KK4	
		CLXSU008KK5	
	<b>Safenet, Inc.</b>	Model 300	
		Model 330	
	<b>De-La Rue</b>	VisaCash	



### Technical Specifications - Input Devices

	<b>Gemplus</b>	Gem Expresso GKK32K Gemclub Memo GemClub Micro GemXplore GemSafe
<b>Smart Card Compatibility</b>		SLE66C322P SLE4406 SLE4406E SLE4406E SE
	<b>Infineon</b>	SLE4418 SLE4428 SLE4432 SLE4436E SLE4442 SLE5536
	<b>SafLink (Litronic)</b>	Forte
	<b>Shart</b>	Java Card
		CosmopolIIC v4 CosmopolIIC v4.1
	<b>Oberthur</b>	Cosmo ID-One GalatIIC v2.1 US DoD CAC
	<b>Memory Cards</b>	
		AT24C01ASC AT24C02SC AT24C04SC AT24C08SC AT24C16SC
	<b>Atmel</b>	AT24C32SC AT24C64SC AT24C128SC AT24C256SC AT24C512SC AT88SC153 AT88SC1608
	<b>ISSI</b>	IS23SC4418 IS23SC4428
<b>ST</b>	14C02	
<b>Telefonkarte</b>	SLE4406 SLE4436 SLE5536	
<b>XICOR</b>	X24026	

---

### HP PS/2 Optical Mouse

### Technical Specifications - Input Devices

<b>Dimensions</b> (H x L x W)	1.56 x 2.44 x 4.61 in	
	3.95 x 6.21 x 11.7 cm	
<b>Weight</b>	4.44 oz	
	126 g	
<b>Environmental</b>	<b>Operating temperature</b>	-32° to 104°F 0° to 40° C
	<b>Non-operating temperature</b>	-4° to 140°F -20° to 60° C
	<b>Operating humidity</b>	10% to 90% (non condensing at ambient)
	<b>Non-operating humidity</b>	10% to 90% (non condensing at ambient)
	<b>Operating shock</b>	40 g, 6 surfaces
	<b>Non-operating shock</b>	80 g, 6 surfaces
	<b>Operating vibration</b>	2 g peak acceleration
	<b>Non-operating vibration</b>	4 g peak acceleration
	<b>Drop</b> (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
	<b>Operating voltage</b>	5 VDC ± 10%
	<b>Power consumption</b>	100mA
	<b>System consumption</b>	PS/2 mini-din connector
	<b>ESD</b>	CE level 4, 15 kV air discharge
	<b>EMI-RFI</b>	Conforms to FCC rules for a Class B computing device
<b>Microsoft PC99 - 2001</b>	Functionally compliant	
<b>Resolution</b>	400 ± 20% DPI	
<b>Tracking speed</b>	10 in/s (25.4 cm/s) maximum	
<b>Acceleration</b>	100 in/s/s (2.54 m/s/s)	
<b>Switch actuation</b>	61 g nominal peak force	
<b>Mechanical</b>	<b>Switch life</b>	3,000,000 operations (using Hasco modified tester)
	<b>Switch type</b>	Low force micro-switches
	<b>Tracking mechanism life</b>	155 mi (250 km) at average speed of 10 in/s
	<b>Cable length</b>	6 ft (1.8 m)
<b>Microsoft PC99 - 2001</b>	Mechanically compliant	

### Technical Specifications - Input Devices

<b>Scroll wheel</b>	<b>Width</b>	8 mm
	<b>Diameter</b>	1.01 in (25.6 mm)
	<b>Maximum rotation speed</b>	48 rats/sec
	<b>Switch type</b>	Light force micro-switch
	<b>Switch life</b>	1 million operations
	<b>Mechanical life</b>	Minimum 200,000 revolutions
<b>Regulatory approvals</b>	<b>Compliant</b>	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC

### HP USB Optical Mouse

<b>Dimensions</b> (H x L x W)	1.5 x 4.5 x 2.5 in
	3.8 x 11.6 x 6.3 cm
<b>Weight</b>	0.27 lb
	0.12 kg
<b>Cable length</b>	72.8 in
	185 cm
<b>System requirements</b>	Microsoft Windows 95, 98, 2000, Me, XP and Vista Available USB port

### HP USB Laser Mouse

<b>Scroll Wheel</b>	24	
<b>Maximum Rotation Speed</b>	48 rats/sec	
<b>Switch Type</b>	wheel	
<b>Switch Life</b>	Button – 3,000,000 Wheel – 1,000,000 times Tilt switch – 500,000 times	
<b>Environmental</b>	<b>Operating Temperature</b>	32° to 104° F 0° to 40° C
	<b>Non-operating Temperature</b>	-4° to 140° F -20° to 60° C
	<b>Operating Humidity</b>	10% to 90% (non-condensing at ambient)
	<b>Non-operating Humidity</b>	20% to 80% (non-condensing at ambient)
	<b>Operating Shock</b>	40 g, six surfaces

### Technical Specifications - Input Devices

<b>Electrical</b>	<b>Non-operating Shock</b>	80 g, six surfaces
	<b>Operating Vibration</b>	2-g peak acceleration
	<b>Non-operating Vibration</b>	4-g peak acceleration
	<b>Operating Voltage</b>	+ 5VDC $\pm$ 5%
	<b>Power Consumption</b>	
	<b>MTBF</b>	> 150,000 hrs
	<b>ESD</b>	IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV
	<b>EMI-RFI</b>	FCC Class B
	<b>PC98</b>	PC 99 Compliant
	<b>Mechanical</b>	<b>Resolution</b>
<b>Tracking Speed</b>		25 cm/sec
<b>Acceleration</b>		0.5mm
<b>Switch Actuation</b>		0.6N (60gf)
<b>Switch Life</b>		Button – 3,000,000 Wheel – 1,000,000 times Tilt switch – 500,000 times
<b>Cable Length</b>		1850mm
<b>PC98-99</b>		PC99 compliant
<b>Regulatory Approvals</b>	UL60950-1, UL 94, UL 746 (A-E), UL 796 TUV/GS: EN 60950-1, EN 60825-1 FCC Class B, UL 1950, cUL, TUV GS, CE, C-tick, VCCI, BSMI, RRL	

### Technical Specifications - Optical Storage

#### HP Blu-ray Writer Drive

<b>AMO Part Number</b>	AR482AA
<b>Height</b>	5.25-inch, half-height, tray-load
<b>Orientation</b>	Either horizontal or vertical
<b>Interface type</b>	SATA
<b>Disc capacity</b>	50 GB DL or 25 GB standard
<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 7.5 in 15.0 x 4.4 x 19.0 cm
<b>Weight (max)</b>	2.0 lb 907g

<b>DVD-ROM</b>	8.5GB DL or 4.7GB standard
<b>Blu-ray</b>	50GB DL or 25GB standard
<b>Full Stroke DVD</b>	< 250 ms (seek)
<b>Full Stroke CD</b>	< 210 ms (seek)
<b>Blu-ray</b>	< 275 ms (seek)

(Time to drive ready from tray loading)

#### Disc Capacity

BD-ROM (SL/DL)	25S / 28S
BD-R (SL/DL)	25S / 28S
BD-RE (SL/DL)	25S / 28S
DVD-ROM (SL/DL)	18S / 18S
DVD-R (SL/DL)	25S / 25S
DVD-RW	25S
DVD+R (SL/DL)	25S / 25S
DVD+RW	25S
DVD-RAM	45S
CD-ROM	15S

#### Startup Time

CD-ROM up to 40X
CD-RW up to 40X
8x CAV

#### CD-ROM Read

DVD-RAM up to 5X
DVD+RW up to 10X
DVD-RW up to 10X
DVD+R DL up to 8X

#### DVD-ROM Read

DVD-R DL up to 8X
DVD-ROM up to 16X
DVD-ROM DL up to 8X
DVD+R up to 12X

#### Maximum Data Transfer Rates

DVD-R up to 12X
BD-ROM up to 6X
BD-ROM DL up to 4.8X

### Technical Specifications - Optical Storage

<b>Power</b>	<b>Blu-ray</b>	BD-R up to 6X BD-R DL up to 4.8X BD-R up to 6X BD-RE SL/DL up to 4.8X
	<b>Source</b>	SATA DC power receptacle
	<b>DC Power Requirement</b>	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum
<b>Environmental</b> (all conditions non-condensing)	<b>Temperature</b> (operating)	41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b> (operating)	10% to 90%
	<b>Maximum Wet Bulb Temperature</b> (operating)	86° F (30° C)

### HP SuperMulti Drive

<b>AMO Part Number</b>	AR630AT	
<b>Height</b>	5.25-inch, half-height, tray-load	
<b>Orientation</b>	Either horizontal or vertical	
<b>Interface type</b>	Serial ATA	
<b>Dimensions</b> (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
<b>Weight</b> (max)	2.6 lb (1.2 kg)	
	CD Media Read Access	Random < 120 ms typical Full Stroke < 200 ms typical
	DVD Media Read Access	Random < 130 ms typical Full Stroke < 240 ms typical
		CD-ROM, CD-R Read Up to 6000 KB/s (40X) CD-RW Read Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback Up to 2400 KB/s (16X)
	CD Media Read Transfer	Digital Audio Extraction (CD-ROM, CD-R) Up to 6000 KB/s (40X) Digital Audio Extraction (CD-RW) Up to 4800 KB/s (32X)
		Video CD Playback Up to 2400 KB/s (16X)
		DVD-ROM SL Read Up to 21600 KB/s (16X)
		DVD-ROM DL Read Up to 10800 KB/s (8X)
		DVD Video Playback Up to 10800 KB/s (8X)
		DVD Video SL (other than playback) Up to 21600 KB/s (16X)

### Technical Specifications - Optical Storage

<b>Performance</b>	DVD Media Read Transfer	DVD Video DL (other than playback)	Up to 10800 KB/s (8X)	
		DVD-R	Up to 21600 KB/s (16X)	
		DVD+R	Up to 21600 KB/s (16X)	
		DVD-RW	Up to 10800 KB/s (8X)	
		DVD-R DL	Up to 10800 KB/s (8X)	
		DVD+RW	Up to 10800 KB/s (8X)	
		CD-R Write	Up to 6000 KB/s (40X)	
		CD-RW	600 KB/s (4X)	
		CD Media Write Transfer	CD-RW (High speed)	1500 KB/s (10X)
			CD-RW (Ultra speed)	Up to 3600 KB/s (24X)
			CD-RW (Ultra speed+)	Up to 4800 KB/s (32X)
			DVD+R	Up to 21600 KB/s (16X)
			DVD+R DL (v1.2)	Up to 16200 KB/s (12X)
			DVD+R DL (v1.1)	Up to 10800 KB/s (8X)
			DVD+RW (Volume 2 v1.0)	Up to 10800 KB/s (8X)
		DVD+RW (Volume 1 v1.3)	Up to 5400 KB/s (4X)	
		DVD-R (v2.1 rev. 6.0)	Up to 16200 KB/s (12X)	
	DVD Media Write Transfer	DVD-R (v2.1 rev. 4.0)	Up to 21600 KB/s (16X)	
		DVD-R DL (v3.0 rev. 5.0)	Up to 10800 KB/s (8X)	
		DVD-R DL (v3.0 rev. 3.0)	Up to 10800 KB/s (8X)	
		DVD-RW (v1.2 rev. 3.0)	8100 KB/s (6X)	
		DVD-RW (v1.2 rev. 2.0)	Up to 5400 KB/s (4X)	
		DVD-RAM (v2.2 rev. 5.0)	Up to 16200 KB/s (12X)	
		DVD-RAM (v2.2 rev. 2.0)	Up to 6750 KB/s (5X)	
<b>Media Compatibility</b>		<b>Media</b>	<b>Read</b>	<b>Write</b>
		CD-ROM	Yes	No
		CD-R	Yes	No
		CD-RW	Yes	No
		DVD-ROM	Yes	No
		DVD-ROM DL	Yes	No
		DVD-RAM	Yes	No
		DVD+R	Yes	No
		DVD+R DL	Yes	No
		DVD+RW	Yes	No
		DVD-R	Yes	No
		DVD-RW	Yes	No
		DVD-R DL	Yes	No
		Source	SATA DC power receptacle	
		DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p
	12 VDC ± 5%		200 mV ripple p-p	

### Technical Specifications - Optical Storage

<b>Power Supply</b>		5 VDC	<1000 mA (typical) 1600 mA (max.)
	DC Current	12 VDC	1200 mA (typical) 2000 mA (max.)
<b>Rear Panel</b>		Total Drive Power (Standby Mode)	< 2.5W
	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
	Markings to identify each connector		
<b>Environmental conditions</b> (all conditions non-condensing)	Temperature (operating)	41° to 122° F (5° to 50° C)	
	Temperature (storage)	-22° F to 140° F (-30° C to 60° C)	
	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
	Altitude	0 to 10,171 ft. (0 to 3,100 metres)	

### HP DVD-ROM Drive

<b>AMO Part Number</b>	AR629AA		
<b>Height</b>	5.25-inch, half-height, tray-load		
<b>Orientation</b>	Either horizontal or vertical		
<b>Interface type</b>	Serial ATA		
<b>Dimensions</b> (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
<b>Weight</b> (max)	2.6 lb (1.2 kg)		
<b>Performance</b>	CD Media Read Access	Random	< 120 ms typical
		Full Stroke	< 200 ms typical
	DVD Media Read Access	Random	< 130 ms typical
		Full Stroke	< 240 ms typical
	CD Media Read Transfer	CD-ROM, CD-R Read	Up to 6000 KB/s (40X)
		CD-RW Read	Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
		Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)
		Video CD Playback	Up to 2400 KB/s (16X)
	DVD-ROM SL Read	Up to 21600 KB/s (16X)	
	DVD-ROM DL Read	Up to 10800 KB/s (8X)	
	DVD Video Playback	Up to 10800 KB/s (8X)	



### Technical Specifications - Optical Storage

		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)
	DVD Media Read Transfer	DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
		DVD-R	Up to 21600 KB/s (16X)
		DVD+R	Up to 21600 KB/s (16X)
		DVD-RW	Up to 10800 KB/s (8X)
		DVD-R DL	Up to 10800 KB/s (8X)
		DVD+RW	Up to 10800 KB/s (8X)
	<b>Media</b>	<b>Read</b>	<b>Write</b>
<b>Media Compatibility</b>	CD-ROM	Yes	No
	CD-R	Yes	No
	CD-RW	Yes	No
	DVD-ROM	Yes	No
	DVD-ROM DL	Yes	No
	DVD-RAM	Yes	No
	DVD+R	Yes	No
	DVD+R DL	Yes	No
	DVD+RW	Yes	No
	DVD-R	Yes	No
	DVD-RW	Yes	No
	DVD-R DL	Yes	No
	Source	SATA DC power receptacle	
<b>Power Supply</b>	DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p
		12 VDC ± 5%	200 mV ripple p-p
	5 VDC	<1000 mA (typical) 1600 mA (max.)	
<b>Rear Panel</b>	DC Current	12 VDC	1200 mA (typical) 2000 mA (max.)
		Total Drive Power (Standby Mode)	< 2.5W
<b>Environmental conditions</b> (all conditions non-condensing)	SATA Power Connector, 15-pin		
	SATA Data Connector, 7-pin		
	Markings to identify each connector		
	Temperature (operating)	41° to 122° F (5° to 50° C)	
	Temperature (storage)	-22° F to 140° F (-30° C to 60° C)	
Relative Humidity	10% to 90%		
Maximum Wet Bulb Temperature	86° F (30° C)		
Altitude	0 to 10,171 ft. (0 to 3,100 meters)		

### Technical Specifications - Optical Storage

---

#### HP Slim SuperMulti Drive

<b>AMO Part Number</b>	VP034AA	
<b>Height</b>	12.7mm height	
<b>Orientation</b>	Either horizontal or vertical	
<b>Interface type</b>	SATA/ATAPI	
<b>Disc recording capacity</b>	Up to 8.5 GB DL or 4.7 GB standard	
<b>Dimensions (W x H x D)</b>	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)	
<b>Weight (max)</b>	0.42 lb (190 g)	
<b>Write speeds</b>	<b>DVD-RAM</b>	Up to 5X
	<b>DVD-R DL</b>	Up to 4X
	<b>DVD+R</b>	Up to 8X
	<b>DVD+RW</b>	Up to 4X
	<b>DVD+R DL</b>	Up to 4X
	<b>DVD-R</b>	Up to 8X
	<b>DVD-RW</b>	Up to 6X
	<b>CD-R</b>	Up to 24X
	<b>CD-RW</b>	Up to 16X
	<b>Read speeds</b>	<b>DVD-RAM</b>
<b>DVD-RW, DVD+RW</b>		Up to 8X
<b>DVD-R DL, DVD+R DL</b>		Up to 6X
<b>DVD+R, DVD-R</b>		Up to 8X
<b>DVD-ROM DL, DVD-ROM</b>		Up to 8X
<b>CD-ROM, CD-R</b>		Up to 24X
<b>CD-RW</b>		Up to 24X
<b>Access time</b> (typical reads, including settling)	<b>Random</b>	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	<b>Full Stroke</b>	DVD: < 250 ms (seek), CD: < 210 ms (seek)
	<b>Stop Time</b>	< 4 seconds
	<b>Cache Buffer</b>	2 MB (minimum)

### Technical Specifications - Optical Storage

	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s - default)
<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p
		12 VDC $\pm$ 5%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC (< 1000 mA typical, 1600 mA maximum)
12 VDC (< 600 mA typical, 1400 mA maximum)		
	<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
<b>Audio output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	74 dB
	<b>Channel Separation</b>	65 dB
<b>Environmental conditions (operating - non-condensing)</b>	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b>	10% to 90%
	<b>Maximum Wet Bulb Temperature</b>	86° F (30° C)

### HP Slim DVD-ROM Drive

<b>AMO Part Number</b>	VP033AA	
<b>Height</b>	12.7mm	
<b>Orientation</b>	Either horizontal or vertical	
<b>Interface type</b>	SATA/ATAPI	
<b>Dimensions (W x H x D)</b>	5.0 x 0.5 x 5.0 in (128 x 13.6 x 129 mm)	
<b>Weight (max)</b>	0.42 lb (190 g)	
<b>Read speeds</b>	<b>DVD+R/-R/+RW/-RW/+R DL /-R DL</b>	Up to 4X
	<b>DVD-ROM</b>	Up to 8X
	<b>CD-ROM, CD-R</b>	Up to 24X
	<b>CD-RW</b>	Up to 24X

### Technical Specifications - Optical Storage

<b>Access time</b> (typical reads, including settling)	<b>Random DVD</b>	DVD: < 140 ms (typical), CD: < 125 ms (typical)
	<b>Random CD</b>	DVD: < 250 ms (seek), CD: < 210 ms (seek)
	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s)
<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p
	<b>DC Current</b>	5 VDC - <1000 mA typical, < 1600 mA maximum
	<b>Total Drive Power</b> (standby mode)	< 2.5 Watt
<b>Audio output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	74 dB
	<b>Channel Separation</b>	65 dB
<b>Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b>	5% to 85%
	<b>Maximum Wet Bulb Temperature</b> (operating)	86° F (30° C)

### Technical Specifications - Removable Storage

#### HP 22-n-1 Media Card Reader plus 1394 Media Card Reader

USB 2.0 High-speed interface

##### USB Interface

Note:

Requires the USB cable to be connected to the internal USB 2.0 port or a USB 2.0 PCI card.

##### 1394 Interface

Two IEEE-1394a external ports; 1 IEEE-1394a internal port (connects to the pass through cable on the media card reader)

Supports hardware ECC (Error Correction Code) function

Supports hardware CRC (Cyclic Redundancy Check) function

Supports MS 4-bit parallel transfer mode

Supports MS-PRO 4-bit parallel transfer mode

##### Advance protocol support

Supports MS PRO-HG Duo 4-bit parallel transfer mode

Supports SD 4-bit parallel transfer mode

Supports high-speed 50Mhz SD 4-bit card (version 2.0)

Supports high-speed 52Mhz MultiMediaCard 8-bit card (version 4.2)

Supports CF v4.0 with PIO mode 6 and Ultra DMA mode

CompactFlash Type I

CompactFlash Type II

Microdrive

MultiMediaCard

Reduced Size MultiMediaCard (RS MultiMediaCard)

MultiMediaCard 4.2 (MultiMediaCard Plus, including MultiMediaCard Plus HC)

Reduced Size MultiMediaCard 4.2 (MultiMediaCard Mobile, including MultiMediaCard Mobile HC)

Secure Digital Card (SD)

Secure Digital High Capacity (SDHC)

miniSD

miniSD High Capacity

##### Supported media type

Micro SD (T-Flash)

Micro SD HC

Memory Stick

Memory Stick Select

Memory Stick Duo (MS Duo)

### Technical Specifications - Removable Storage

Memory Stick PRO (MS PRO)  
Memory Stick PRO Duo (MS PRO Duo)  
Memory Stick PRO-HG Duo  
MagicGate Memory Stick (MG)  
MagicGate Memory Stick Duo  
Picture Card  
Memory Stick Micro (M2)  
MultiMediaCard Micro

#### Supported media type with card adapter

#### Environmental

##### Operational Environmental Extremes

Test Parameters/Conditions - Power applied, unit operating on system  $\pm 5\%$  nominal supply voltage.  
10°C 10% R.H. = 24 hours  
10°C 90% R.H. = 24 hours  
20°C 90% R.H. = 24 hours  
30°C 90% R.H. = 24 hours  
40°C 90% R.H. = 24 hours  
50°C 90% R.H. = 24 hours  
50°C 10% R.H. = 24 hours

##### Storage Environmental Extremes

Test Parameters/Conditions  
140°F (60°C) @ 80% R.H. for 96 hours  
-22°F (-30°C) @ 20% R.H. for 48 hours  
No power applied  
Delta °C < 1.0°C/min  
Delta % R.H. < 1.5% R.H./min

#### Approvals

USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0  
Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.3  
FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T

### Technical Specifications - Environmental Data

**Eco-Label Certifications & declarations** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR<sup>®</sup>
- IT ECO declaration
- EPEAT Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country

#### Ultra-Slim Desktop

Energy Consumption (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	26.96 W	27.61 W	27.12 W
Sleep (Energy Star low power mode)	3.585 W	3.63 W	3.582 W
Off	1.361 W	1.411 W	1.359 W
<b>Heat Dissipation*</b>	115 VAC	230 VAC	100 VAC
Normal Operation	92 BTU/hr	94 BTU/hr	93 BTU/hr
Sleep	12 BTU/hr	12 BTU/hr	12 BTU/hr
Off	5 BTU/hr	5 BTU/hr	5 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
System Fan Off		
Idle	3.8	28
Fixed Disk (random writes)	3.8	28

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

#### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see: [www.epeat.net](http://www.epeat.net)
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

### Technical Specifications - Environmental Data

- This product contains 0.40% post consumer recycled plastic (by wt.)
- This product is 92.3% recyclable when properly disposed of at end of life.

#### Packaging Materials

- External:
  - Corrugated –3637.5 g
- Internal:
  - Polyethylene low density – 7.6 g
- The corrugated packaging material contains at least 80% recycled content.
- The corrugated packaging material contains at least 0% recycled content.

#### **Small Form Factor**

<b>Energy Consumption</b> (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	41.4254 W	40.8627 W	41.5632 W
Sleep (Energy Star low power mode)	2.7652 W	2.9789 W	2.7294 W
Off	1.3332 W	1.4949 W	1.3320 W
<b>Heat Dissipation*</b>	115 VAC	230 VAC	100 VAC
Normal Operation	142 BTU/hr	140 BTU/hr	142 BTU/hr
Sleep	9 BTU/hr	10 BTU/hr	9 BTU/hr
Off	5 BTU/hr	5 BTU/hr	5 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### **Declared Noise Emissions**

(in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
System Fan Off		
Idle	3.7	27
Fixed Disk (random writes)	3.7	27



### Technical Specifications - Environmental Data

**Batteries** This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

**Additional Information**

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0% post consumer recycled plastic (by wt.)
- This product is 86.2% recyclable when properly disposed of at end of life.

Packaging Materials

- External:
  - Corrugated Carton – 1362 g
  - Corrugated – 343 g
- Internal:
  - EPE – Expanded Polyethylene – 198 g
  - Polyethylene low density foam – 39 g
- The Corrugated Carton packaging material is made from 75% recycled content.
- The EPE – Expanded Polyethylene packaging material is made from 100% recycled content.
- The Polyethylene low density foam packaging material is made from 100% recycled content.

**Convertible Minitower**

<b>Energy Consumption</b> (typically configured)	115 VAC	230 VAC	100 VAC
Normal Operation	42.224 W	42.076 W	42.366 W
Sleep (Energy Star low power mode)	2.962 W	2.886 W	2.894 W
Off	0.646 W	0.802 W	0.652 W
<b>Heat Dissipation*</b>	115 VAC	230 VAC	100 VAC
Normal Operation	144 BTU/hr	144 BTU/hr	145 BTU/hr
Sleep	10 BTU/hr	10 BTU/hr	10 BTU/hr
Off	2 BTU/hr	3 BTU/hr	2 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

### Technical Specifications - Environmental Data

#### Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.8	28
Fixed Disk (random writes)	3.8	28

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Lithium

#### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
- This product contains 0% post consumer recycled plastic (by wt.)
- This product is 91.7% recyclable when properly disposed of at end of life.

#### Packaging Materials

- External:
  - Corrugated – 2550g
- Internal:
  - Polyethylene high density – 160g
- The Corrugated packaging material is made from 38% recycled content.
- The Polyethylene high density packaging material is made from 100% recycled content.

#### All Models

#### RoHS Compliance

Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at:

[http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants

### Technical Specifications - Environmental Data

- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5 micro-grams/cm<sup>2</sup>/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

#### Packaging

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

### Technical Specifications - Environmental Data

Copyright © 2011 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Core 2 Quad, Core 2 Duo, Pentium and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.